## **DEPARTMENT OF WATER AND SANITATION**

NO. 1419 21 DECEMBER 2018

# NATIONAL WATER ACT, 1998 (ACT NO. 36 OF 1998)

# PROPOSED RESERVE DETERMINATION OF WATER RESOURCES FOR THE VAAL CATCHMENT

i, Gugile Nkwinti, Minister of Water and Sanitation, in terms of section 16(3) of the National Water Act, 1998 (Act No. 36 of 1998) hereby publish, for public comment the proposed Reserve of the water resources for the Vaal catchment area, as set out in the Schedule.

Any person who wishes to submit written comments with regard to the proposed Reserve should submit the comments within 60 days from the date of publication of this Notice to:

Acting Director: Reserve Determination

Attention: Mr Kwazi Majola

Department of Water and Sanitation Ndinaye Building 178 Francis Baard Street

Private Bag X313

Pretoria 0001

Email: majolak@dws.gov.za

**NKWINTI GE (MP)** 

MINISTER OF WATER AND SANITATION

DATE: 23/10/2018

#### **SCHEDULE**

# PROPOSED RESERVE OF WATER RESOURCES FOR THE VAAL CATCHMENT IN TERMS OF SECTION 16(1) AND (2) OF THE NATIONAL WATER ACT, 1998 (ACT NO. 36 OF 1998)

## **DESCRIPTION OF WATER RESOURCE**

1. (1) The Reserve is determined for all or part of every significant water resource within the Vaal catchment as set out below:

Water Management Area: Vaal

Drainage Regions: C Primary Drainage Region:

C11, C12, C13, C21, C22, C23, C81, C82, C83, C24, C25, C41,

C42, C43, C60, C70, C31, C32, C33, C91, C92, C41, C42

(excluding the Modder Riet catchment, C51 and C52; and excluding the Molopo catchment, D41 and D42 of the Vaal Water

Management Area)

Rivers: Vaal, Wilge, Klip, Klein Vaal, Waterval, Suikerbosrand,

Blesbokspruit, Mooi, Vals, Schoonspruit, Sand, Vet, Harts

(2) The Minister has in terms of section 12 of the National Water Act, 1998 (Act No.36 of 1998) ("the Act"), prescribed a system for classifying water resources by issuing Government Notice No. R. 810, published in Government *Gazette* No. 33541 dated 17 September 2010. In terms of section 16(1) of the Act, the Minister must, as soon as reasonably practicable after the class of all or part of a water resource has been determined, by Notice in the *Gazette*, determine the Reserve for all or part of that water resource.

(3) The Minister, in terms of section 16(3) of the Act, proposes, for the purpose of section 16(1) of the Act, the following Reserve determination for the Vaal catchment.

## 2. ACRONYMS AND DEFINITIONS

## 2.1 Acronyms

BAS	Don't ette in elde - tot-					
	Best attainable state					
BHN	Basic Human Needs					
CAWC	Co-ordinated Water Bird Counts					
CBA	Critical Biodiversity Areas					
EC	Ecological Category					
EcoSpecs	Ecological Specifications					
EIA	Environmental Impact Assessment					
EIS	Ecological Importance and Sensitivity					
ESA	Ecological Support Areas					
EWR	Ecological Water Requirement					
GRAII	Groundwater Resource Assessment Phase II					
GRDM	Groundwater Reserve Determination Methodology					
GRUs	Groundwater Resource Units					
MAR	Mean Annual Runoff					
MCM	Million Cubic Metres					
PES	Present Ecological Status					
REC	Recommended Ecological Category					
TEC	Target Ecological Category					
TPCs	Thresholds of Potential Concern					
WUL	Water Use Licence					

#### 2.2 Definitions

**Baseflow** is a sustained low flow in rivers during dry or fair weather conditions, but not necessarily all contributed by groundwater; includes contribution from delayed interflow and groundwater discharge.

**Ecological Importance and Sensitivity (EIS):** Key indicators in the ecological classification of water resources. Ecological importance relates to the presence, representativeness and diversity of species of biota and habitat. Ecological sensitivity relates to the vulnerability of the habitat and biota to modifications that may occur in flows, water levels and physico-chemical conditions.

**Ecological Water Requirements (EWR):** The flow patterns (magnitude, timing and duration) and water quality needed to maintain a riverine ecosystem in a particular condition. This term is used to refer to both the quantity and quality components.

**Ecological Water Requirement (EWR) Sites:** Specific points on the river as determined through the site selection process. An EWR site consists of a length of river which may consist of various cross-sections for both hydraulic and ecological purposes. These sites provide sufficient indicators to assess environmental flows and assess the condition of biophysical components (drivers such as hydrology, geomorphology and physico-chemical) and biological responses (viz. fish, invertebrates and riparian vegetation).

**Present Ecological State (PES):** A category indicating the current health or integrity of various biological attributes of the water resource, compared to the natural or close to natural reference conditions. The results of the process are provided as Ecological Categories (ECs) ranging from A (near natural) to F (completely modified) for the PES.

**Recharge** is the addition of water to the zone of saturation, either by downward percolation of precipitation or surface water and/ or the lateral migration of groundwater from adjacent aquifers.

**Recommended Ecological Category (REC):** An ecological category indicating the ecological management target for a water resource based on its ecological classification that should be attained. Categories range from Category A (unmodified, natural) to Category D (largely modified).

**River Node (biophysical node):** These are modelling point's representative of an upstream reach or area of an aquatic eco-system (rivers, wetlands, estuaries and groundwater) for which a suite of relationships apply.

**Sub-quaternary catchments:** A finer subdivision of the quaternary catchments (the catchment areas of tributaries of main stem rivers in quaternary catchments).

**Target Ecological Category (TEC):** Means the assigned ecological condition by the Minister to a water resource that reflects the ecological condition of that water resource in terms of the deviation of its biophysical components from the natural reference condition. The ultimate target to achieve a sustainable system both ecologically and economically taking into account the PES and REC.

# PROPOSED RESERVE DETERMINATION AS REQUIRED IN TERMS OF SECTION 16(1) AND (2) OF THE NATIONAL WATER ACT, 1998

- 3. (1) The proposed Reserve which includes the Ecological Water Requirements (EWRs) and the —Basic-Human-Needs-Reserve-(BHN)-for-the-Rivers-at-EWR-sites-and-selected-biophysical nodes in the Vaal catchment is set out in section 4. The Vaal catchment locality and EWR sites are indicated in **Figure 1**.
  - (2) The water quality component of the proposed Reserve for the Rivers at the EWR sites in Vaal catchment in terms of section 16(1) of the Act is set out in section 5.
  - (3) The proposed Groundwater Reserve for Water Quantity in terms of section 16(1) of the Act for the Vaal catchment is set out in section 6.
  - (4) The proposed Groundwater Reserve for Water Quality in terms of section 16(1) of the Act for the Vaal catchment is set out in **section 6**.
  - (5) The proposed ecological specifications for the Wetlands in terms of section 16(1) of the Act for Vaal catchment is set out in **section 7**.
  - (6) The Reserve will apply from the date signed off as determined in terms of section 16(1) of the Act, unless otherwise specified by the Minister.

## 4. PROPOSED RESERVE FOR RIVERS

Proposed Reserve determination and ecological categorisation in terms of section 16(1) of the Act for the rivers of the Vaal catchment area, where the Reserve is expressed as a percentage of the NMAR for the respective catchments (cumulative):

Table 4.1: Proposed Reserve for the Rivers at the EWR sites which include the EWRs to protect the aquatic ecosystem

and the BHN requirements

Quaternary Catchment	Water Resource	PES	EIS	TEC <sup>5</sup>	MAR (MCM) <sup>1</sup>	Reserve <sup>2</sup> (%MAR)	Ecological Reserve <sup>3</sup> (%MAR)	Basic human needs Reserve <sup>4</sup> (%MAR)
C11J	Vaal River – EWR 1	B/C	High	B/C	332.3*	39.411	39.41	0.001
C11M	Vaal River – EWR 2	С	Moderate	С	457.7#	13.610	13.61	0.00022
C12F	Waterval – EWR WA1	D	Low	D	76.71#	3.501	3.5	0.0007
C12G	Waterval – EWR WA2	D	Low	D	147.43#	6.4003	6.4	0.00027
C12H	Vaal River – EWR 3	С	Moderate	С	858.1#	14.300	14.3	0.00004
C22F	Vaal River – EWR 4	С	High	B/C	1977.3#	21.550	21.55	0.00015
C23L	Vaal River – EWR 5	C/D	High	С	2288°	34.100	34.1	0.00004
C13D	Klip River – EWR 6	B/C	Moderate	B/C	95.3#	26.542	26.54	0.0021
C81A	Wilge River – EWR 7	A/B	High	A/B	23.5#	45.893	45.88	0.0128
C82C	Wilge River – EWR 8	С	Moderate	С	474.3#	11.770	11.77	0.00006
C21C	Suikerbosrand – EWR 9	С	High	B/C	31.3#	41.893	41.89	0.0032
C21G	Suikerbosrand – EWR 10	C/D	Moderate	C/D	149.27*	34.391	34.39	0.0007
C21F	Blesbokspruit – EWR 11	D	Low	D	100.69*	18.145	18.14	0.0050
C11C	Klein Vaal River – RE-EWR 1	С	Moderate	С	26.09#	24.725	24.71	0.0153
C23G	Mooi River - RE-EWR 2	D	Low	D	37.7#	19.061	19.05	0.0106
C24B	Vaal River – EWR 12	D	Moderate	D	1574.64*	28.280	28.28	0.00009
C24J	Vaal River – EWR 13	C/D	Moderate	C/D	1638.37°	35.800	35.8	0.00009
C60J	Vals River – EWR 14	C/D	Moderate	C/D	145.79#	17.050	17.05	0.00034
C43A	Vet River – EWR 15	C/D	Moderate	C/D	253.15*	18.200	18.2	0.00028
C41E	Klein Vet – RE – EWR 3	С	Moderate	С	49.56#	19.540	19.54	0.00028
C42J	Sand – EWR RD1	C/D	Moderate	B/C	140.76#	23.820	23.82	0.00007
C42L	Sand – EWR RD2	С	Moderate	B/C	180.692#	23.490	23.49	0.00011
C24E	Schoonspruit – EWR S1	С	Low	С	59.38#	35.805	35.8	0.0049
C24G	Schoonspruit – EWR S3	C/D	Low	C/D	89.96#	30.902	30.9	0.0018
C24H	Schoonspruit – EWR S4	C/D	Low	C/D	102.09#	31.203	31.2	0.0034
C91A	Vaal – EWR 16	D	Moderate	D	3242.51*	13.020	13.02	0.00007
C33C	Harts – EWR 17	D	Moderate	D	147.85*	51.6034	51.60	0.0034
C92B	Vaal – EWR 18	С	Moderate	С	1177.28*	21.871	21,87	0.00060

<sup>1)</sup> MAR is the Mean Annual Runoff (\* Based on natural flow at the EWR site MAR; \* Based on present day flow at the EWR site; \* Based on observed flow at the EWR site).

<sup>2)</sup> The Reserve is the total requirement that accounts for both the Ecological Reserve and the Basic Human Needs Reserve (BHN).

Ecological Reserve requirement represents the long term mean based on the MAR. If the MAR changes, this volume will also change.
 Represents the BHN requirement as a percentage of the MAR. Basic human needs includes the population directly reliant on rivers, streams and springs for water supply (derived from 2011 Census data)

Target Ecological Category (TEC): The ultimate target to achieve a sustainable system both ecologically and economically taking into account the PES and REC.

# **ECOLOGICAL WATER REQUIREMENTS SITE INFORMATION**

PLANT DIE	FIAID 11		Sub-	Coore	dinates	Quaternary catchment
EWR Site	EWR site name	River	quaternary river reach	Latitude	Longitude	
EWR1	Uitkoms	Vaal	C11J-01838	S26.872800	E29.613840	C11J
EWR2	Grootdraai	Vaal	C11M-01894	S26.92110	E29.27929	C11M
EWR WA1	Waterval_1	Waterval	C12F-01722	S26.64608	E29.01857	C12F
EWR WA2	Waterval_2	Waterval	C12G-01896	S26.88543	E28.88357	C12G
EWR3	Gladdedrift	Vaal	C12C-01997	S26.99087	E28.72971	C12H
EWR4	De Neys	Vaal	C22F-01737	S26.84262	E28.11230	C22F
EWR5	Skandinavia	Vaal	C22L-01792	S26.93243	E27.01367	C23L
EWR6	Klip	Klip	C13D-02226	S27.36166	E29.48503	C13D
EWR7	Upper Wilge	Wilge	C81A-02790	S28.20185	E29.55827	C81A
EWR8	Bavaria	Wilge	C82C-2505	S27.80017	E28.76778	C82C
EWR9	Suikerbos Upstream	Suikerbosrand	C21C-01675	S26.64670	E28.38197	C21C
EWR10	Suikerbos Downstream	Suikerbosrand	C21G-01627	S26.68137	E28.16798	C21G
EWR11	Blesbokspruit	Blesbokspruit	C21F-01447	S26.47892	E28.42488	C21F
RE-EWR1	Klein Vaal	Klein Vaal	C11C-01846	S26.912750	E30.174970	C11C
RE-EWR2	Mooi River	Mooi	C23G-01250	S26.258670	E27.159730	C23G
EWR12	Vaal River: Vermaasdrift	Vaal	C24B-01817	S26.93615	E26.85025	C24B
EWR13	Vaal River: Regina bridge	Vaal	C24J-02016	S27.10413	E26.52185	C24J
EWR14	Vals River: Proklameersdrift	Vals	C60J-02262	S27.48685	E26.81320	C60J
EWR15	Vet River: Fisantkraal	Vet	C43A-02561	S27.93482	E26.12569	C43A
RE-EWR 3	Klein-Vet, just downstream of Winburg	Klein Vet	C41E-03132	S28.564708	E26.943946	C41E
EWR RD1	RD1 at Meloding	Sand	C42J-02716	S28.1131994	E26.9080556	C42J
EWR RD2	RD2 at Steel Bridge	Sand	C42L-02635	S28.1228333	E26.5855555	C42L
S1	EWR S1	Schoonspruit	C24E-01164	S26.31172	E26.31172	C24E
S3	EWR S3	Schoonspruit	C24G-01661	S26.67500	E26.586108	C24G
S4	EWR S4	Schoonspruit	C24H-01860	S26.93333	E26.66528	C24H
EWR16	Downstream Bloemhof Dam	Vaal	C91A-02391	S27.65541	E25.59564	C91A
EWR17	Lloyds weir on Harts River	Harts	C33C-02836	S28.37694	E24.30305	C33C
EWR18	Schmidtsdrift	Vaal	C92B-02903	S28.70758	E24.07578	C92B

Table 4.2: The proposed Reserve for the Rivers at the priority biophysical nodes with High Ecological importance

Quaternary catchment	Node	River	Sub- quaternary river reach	PES	Ecological Importance	REC	Ecological Reserve (%NMAR)	BHM Reserve (%NMAR)	Total Reserve (%NMAR)	NMAR (MCM/a)
C11A	UA.1	Vaal	C11A-01460	B/C	High	B/C	44.09	0.053	44.143	13.27
C13C	UB.1	Vaal	C13C-02550	В	High	В	63.86	0.018	63.878	5.67
C13D	UB.2	Vaal	C13D-02416	B/C	High	B/C	38.86	0.004	38.864	54
C13D	UB.3	Vaal	C13D-02284	B/C	High	В	44.26	0.003	44.263	68.04
C13E	UB.6	Klip	C13E-02228	B/C	High	В	50.66	0.006	50.666	33.6
C81A	UC1.1	Wilge	C81A-02790	В	High	В	45.69	0.004	45.694	69.03
C81L	UC1.3	Meul	C81L-02594	В	High	В	57.25	0.008	57.258	26.49
C81G	UC2.3	Klerkspruit	C81G-02882	В	High	В	69.45	0.017	69.467	5.85
C83G	UD.4	Liebenbergsvlei	C83G-02364	B/C	High	B/C	62.48	0.006	62.486	4.74
C23H	UD.5	Liebenbergsvlei	C23H-02395	B/C	High	В	64.50	0.015	64.515	2.66
C12A	UH.1	Suikerbosrant	C12A-01567	B/C	High	В	47.17	0.002	47.172	28.65

# 5. WATER QUALITY COMPONENT OF THE PROPOSED ECOLOGICAL RESERVE FOR RIVERS

The ecological specifications for water quality for the maintenance of the Reserve target ecological category at each EWR site is detailed in Tables 5.1 to Table 5.18. These are the values of water quality parameters (threshold concentrations) that should not be exceeded in order to meet the water quality attribute of the TEC.

Table 5.1: EWR1: Water Quality Ecological Specifications

River: Vaal		EWR 1: at Uitkoms	Water quality monitoring site/gauge: C1H007/ VS4 GDDC11	
	MgSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 28 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	e data must be ≤ 38 mg/L	
In averagia Calta	MgCl <sub>2</sub>	The 95th percentile of the	e data must be ≤ 36 mg/L	
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	e data must be ≤ 69 mg/L	
	NaCI	The 95th percentile of the	e data must be ≤ 243 mg/L	
	CaSO <sub>4</sub>	The 95th percentile of the	e data must be ≤ 351 mg/L	
	e data must be ≤ 70 mS/m			
Physical variables	рН	The 5 <sup>th</sup> percentile of the to 8.8	data must be 6.5 to 8.0, and the 95th percentile 8.0	
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the	data must be ≥ 7.0 mg/L	
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 0.7 mg/L		
	PO <sub>4</sub> -P	The 50th percentile of the	e data must be ≤ 0.025 mg/L	
Response	Chl-a phytoplankton	The 50th percentile of the	e data must be < 20 µg/L	
variables	Chl-a periphyton	The 50th percentile of the	e data must be < 21 mg/m <sup>2</sup>	
	Ammonia	The 95th percentile of the	e data must be ≤ 0.044 mg/L	
Tavias	Atrazine	The 95th percentile of the	e data must be ≤ 0.064 mg/l	
Toxics	Fluoride	The 95th percentile of the	e data must be ≤ 2.5 mg/L	
	Endosulfan	The 95th percentile of the	e data must be ≤ 0.13 µg/l	

Table 5.2: EWR2: Water Quality Ecological Specifications

River: Vaal		EWR 2: Downstream Grootdraai	Water quality monitoring site/gauge: C1H019			
	MgSO <sub>4</sub>	The 95th percentile of the data mus	t be ≤ 23 mg/L			
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the data mus	t be ≤ 33 mg/L			
	MgCl <sub>2</sub>	The 95th percentile of the data mus	t be ≤ 30 mg/L			
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the data mus	st be ≤ 57 mg/L			
	NaCl	The 95th percentile of the data must	t be ≤ 191 mg/L			
	CaSO <sub>4</sub>	The 95th percentile of the data must	t be ≤ 351 mg/L			
	EC	The 95 <sup>th</sup> percentile of the data must be ≤ 30 mS/m				
Physical variables	рН	The 5 <sup>th</sup> percentile of the data must be 6.5 to 8.0, and the 95th percentile 8.0 to 8.8				
variables	Temperature	Small deviation from the natural temperature range				
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥7.5mg/L				
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 0.25 mg/L				
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤0.025mg/L				
Response	Chl-a phytoplankton	The 50th percentile of the data must	t be <18 μg/L			
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 16 mg/m²				
Toylog	Ammonia	The 95th percentile of the data must	be ≤ 0.044 mg/L			
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L				

Table 5.3: EWR3: Water Quality Ecological Specifications

River: Vaal		EWR 3: at Gladdedrift	Water quality monitoring site/gauge: C1H012		
	MgSO <sub>4</sub>	The 95th percentile of the	data must be ≤ 37 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	data must be ≤ 33 mg/L		
In arrenia Calta	MgCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 30 mg/L		
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 57 mg/L		
	data must be ≤ 191 mg/L				
	CaSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the	data must be ≤ 351 mg/L		
Discolari	EC	The 95 <sup>th</sup> percentile of the data must be ≤ 55 mS/m			
Physical variables	рН	The 5 <sup>th</sup> percentile of the data must be 6.5 to 8.0 and the 95 <sup>th</sup> percentile 8.0 to 8.8			
	Dissolved oxygen	The 5th percentile of the da	ata must be ≥ 7.5 mg/L		
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the	data must be ≤ 0.25 mg/L		
	PO <sub>4</sub> -P	The 50th percentile of the	data must be ≤ 0.125 mg/L		
Response	Chl-a phytoplankton	The 50th percentile of the	data must be < 20 μg/L		
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 21 mg/m <sup>2</sup>			
Toxios	Ammonia	The 95th percentile of the	data must be ≤ 0.1 mg/L		
Toxics	Fluoride	The 95th percentile of the	data must be ≤ 1.5 mg/L		

Table 5.4: EWR4: Water Quality Ecological Specifications

River: Vaal		EWR 4: at De Neys	Water quality monitoring site/gauge: C1H012		
	MgSO <sub>4</sub>	The 95th percentile of the	e data must be ≤ 37 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	e data must be ≤ 33 mg/L		
	MgCl <sub>2</sub>	The 95th percentile of the	e data must be ≤ 30 mg/L		
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	e data must be ≤ 57 mg/L		
	NaCl The 95 <sup>th</sup> percentile of the data must be ≤ 191 mg/L				
	CaSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 351 mg/L			
	EC	The 95th percentile of the data must be ≤ 30 mS/m			
Physical variables	рН	The 5 <sup>th</sup> percentile of the data must be 6.5 to 8.0 and the 95 <sup>th</sup> percentile 8.0 t 8.8			
	Dissolved oxygen	The 5th percentile of the data must be ≥ 7 mg/L			
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the	e data must be ≤ 0.7 mg/L		
	PO <sub>4</sub> -P	The 50th percentile of the	e data must be ≤ 0.125 mg/L		
Response	Chl-a phytoplankton	The 50th percentile of the	e data must be <10 µg/L		
variables Chl-a periphyton The 50 <sup>th</sup> percentile of the data must be ≤ 1.7 mg/m²					
Tavias	Ammonia	The 95th percentile of the	e data must be ≤ 0.1 mg/L		
Toxics	Fluoride	The 95th percentile of the	e data must be ≤ 1.5 mg/L		

Table 5.5: EWR5: Water Quality Ecological Specifications

River: Vaal		EWR 5: Skandinavia	Water quality monitoring site/gauge: C2H122
	MgSO <sub>4</sub>	The 95th percentile of the	data must be ≤ 37 mg/L
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	data must be ≤ 51 mg/L
	MgCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 36 mg/L
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 105 mg/L
	NaCl	The 95th percentile of the	data must be ≤ 191 mg/L
	CaSO <sub>4</sub>	The 95th percentile of the	data must be ≤ 351 mg/L
	EC	The 95th percentile of the	data must be ≤ 85 mS/m
Physical variables	рН	The 5 <sup>th</sup> percentile of the o	data must be 6.5 to 8.0 and the 95 <sup>th</sup> percentile 8.8 to
	Temperature	Temperatures should be	close to natural range
	Dissolved oxygen	The 5th percentile of the of	data must be ≥ 6 mg/L

Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 1.0 mg/L			
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.025 mg/L			
Response variables	Chi-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be ≤ 20 µg/L			
	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 21 mg/m <sup>2</sup>			
Toxics	Ammonia	The 95 <sup>th</sup> percentile of the data must be ≤ 0.1 mg/L			
	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L			
Inorganic ions	Sulphate	The 95th percentile of the data must be ≤ 200 mg/L			

Table 5.6: EWR6: Water Quality Ecological Specifications

River: Klip		EWR 6: Klip	Water quality monitoring site/gauge: C1H002 (Downstream site in C13F)	
	MgSO <sub>4</sub>	The 95 <sup>th</sup> percentile of th	e data must be ≤ 28 mg/L	
Inorganic Salts	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of th	e data must be ≤ 20 mg/L	
	MgCl <sub>2</sub>	The 95th percentile of th	e data must be ≤ 15 mg/L	
	CaCl <sub>2</sub>	The 95th percentile of th	e data must be ≤ 21 mg/L	
	NaCl	The 95th percentile of th	e data must be ≤ 45 mg/L	
	CaSO <sub>4</sub>	The 95th percentile of th	e data must be ≤ 351 mg/L	
	EC	The 95th percentile of th	e data must be ≤ 55 mS/m	
	рН	The 5 <sup>th</sup> percentile of the 8.8	data must be 6.5 to 8.0 and the 95th percentile 8.0 to	
Physical variables	Temperature	Temperatures should be	close to natural range	
Vallables	Dissolved oxygen	Must be between 7 and	8 mg/L	
	Turbidity	Vary by a small amou instream habitats accep	nt from the natural turbidity range, minor silting of table	
Nutrients	Total inorganic Nitrogen (TIN)	The 50th percentile of th	e data must be ≤ 0.75 mg/L	
	PO <sub>4</sub> -P	The 50th percentile of th	e data must be ≤ 0.020 mg/L	
Response	Chi-a phytoplankton	The 50th percentile of th	e data must be < 15 μg/L	
variables	Chl-a periphyton	The 50th percentile of the data must be < 12 mg/m <sup>2</sup>		
T!	Ammonia	The 95th percentile of th	e data must be ≤ 0.0 <b>44</b> mg/L	
Toxics	Fluoride	The 95th percentile of th	e data must be ≤ 1.5 mg/L	

Table 5.7: EWR7: Water Quality Ecological Specifications

River: Wilge		EWR 7: Upper Wilge	Water quality monitoring site/gauge: No weir/WQ site in vicinity of EWR site		
	MgSO <sub>4</sub>	The 95th percentile of the	data must be < 23 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	data must be < 33 mg/L		
	MgCl <sub>2</sub>	The 95th percentile of the	data must be < 30 mg/L		
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	data must be < 57 mg/L		
	NaCl	The 95th percentile of the	data must be < 191 mg/L		
	CaSO <sub>4</sub>	The 95th percentile of the	The 95th percentile of the data must be < 351 mg/L		
	EC	The 95th percentile of the data must be < 55 mS/m			
	рН	The 5 <sup>th</sup> percentile of the data must be 6.5 to 8.0, and the 95 <sup>th</sup> percentile 8.8 t 9.2			
Physical variables	Temperature	Small deviation from the natural temperature range			
variables	Dissolved oxygen	The 5th percentile of the data must be ≥ 8 mg/L			
	Turbidity	Vary by a small amount from the natural turbidity range, minor silti instream habitats acceptable			
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be between < 0.7 mg/L			
	PO <sub>4</sub> -P	The 50th percentile of the data must be < 0.025 mg/L			
Response	Chi-a phytoplankton	The 50th percentile of the	data must be ≤ 15 μgL		
variables	Chl-a periphyton	The 50th percentile of the	data must be ≤ 12 mg/m²		

Toxics	Ammonia	The 95 <sup>th</sup> percentile of the data must be ≤ 0.044 mg/L
TOXICS	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L

Table 5.8: EWR8: Water Quality Ecological Specifications

River: Wilge		EWR 8: Bavaria	Water quality monitoring site/gauge: C8H028	
	MgSO <sub>4</sub>	The 95th percentile of the data must be < 16 mg/L		
lu annonia Calta	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	The 95th percentile of the data must be < 20 mg/L	
	MgCl <sub>2</sub>	The 95th percentile of the	ne data must be < 15 mg/L	
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	ne data must be < 21 mg/L	
	NaCl	The 95th percentile of the	ne data must be < 45 mg/L	
	CaSO <sub>4</sub>	The 95th percentile of the	ne data must be < 351 mg/L	
	EC	The 95 <sup>th</sup> percentile of the	ne data must be <55 mS/m	
	рН	The $5^{\text{th}}$ percentile of the data must be 6.5 to 8.0 and the $95^{\text{th}}$ percentile 8.0 to 8.8		
Physical variables	Temperature	Small deviation from the natural temperature range		
variable3	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 8 mg/L		
	Turbidity	Vary by a small amount from the natural turbidity range, minor silting o instream habitats acceptable		
Nutrients	Total inorganic Nitrogen (TIN)	The 50th percentile of the data must be between <0.7 mg/L		
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be < 0.025 mg/L		
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be < 20 ug/L		
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be < 21 mg/m <sup>2</sup>		
Toxics	Ammonia	The 95th percentile of the	ne data must be ≤ 0.073 mg/L	
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L		

Table 5.9: EWR9: Water Quality Ecological Specifications

River: Suikerbo	srand	EWR 9: Upstream	Water quality monitoring site/gauge: C2H131	
	MgSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be < 37 mg/L		
Inorganic Salts	Na <sub>2</sub> SO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be < 51 mg/L		
	MgCl <sub>2</sub>	The 95 <sup>th</sup> percentile of th	The 95 <sup>th</sup> percentile of the data must be < 30 mg/L	
	CaCl <sub>2</sub>	The 95th percentile of th	e data must be < 57 mg/L	
	NaCl	The 95th percentile of th	e data must be < 45 mg/L	
	CaSO <sub>4</sub>	The 95 <sup>th</sup> percentile of th	e data must be < 351 mg/L	
	EC	The 95th percentile of th	e data must be < 55 mS/m	
	рН	The $5^{\text{th}}$ percentile of the data must be $6.5-8.0$ and the $95^{\text{th}}$ percentile $8.0-8.8$		
Physical variables	Temperature	Small deviation from the natural temperature range		
Variables	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 8 mg/L		
	Turbidity	Vary by a small amount from the natural turbidity range, minor silting o instream habitats acceptable		
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be < 0.7 mg/L		
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be < 0.020 mg/L		
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be < 20 μg/L		
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must < 21 mg/m <sup>2</sup>		
Tavias	Ammonia	The 95th percentile of the	e data must be ≤ 0.073 mg/L	
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L		

Table 5.10: **EWR10: Water Quality Ecological Specifications** 

River: Suikerbosrand		EWR 10: Downstream	Water quality monitoring site/gauge: C2H070	
	MgSO <sub>4</sub>	The 95th percentile of the	data must be < 37 mg/L	
Inorganic Salts	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the data must be < 51 mg/L		
	MgCl <sub>2</sub>	The 95th percentile of the data must be <51 mg/L		
	CaCl <sub>2</sub>	The 95th percentile of the	data must be <105 mg/L	
	NaCl	The 95th percentile of the	data must be < 191 mg/L	
	CaSO <sub>4</sub>	The 95th percentile of the	data must be < 351 mg/L	
	EC	The 95th percentile of the	data must be < 85 mS/m	
Physical	рН	The 5 <sup>th</sup> percentile of the data must be between 6.5 – 8.0 and the 95 <sup>th</sup> percentile 8.0 - 8.8		
variables	Temperature	Small deviation from the natural temperature range		
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 7 mg/L		
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be < 0.7 mg/L		
	PO <sub>4</sub> -P	The 50th percentile of the data must be < 0.125 mg/L		
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be < 30 μg/L		
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be < 21 mg/m <sup>2</sup>		
Toylog	Ammonia	The 95th percentile of the	lata must be ≤ 0.100 mg/L	
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L		

Table 5.11: EWR11: Water Quality Ecological Specifications

River: Blesbokspruit		EWR 11: Blesbokspruit Water quality monitoring site/gauge: C2H185		
MgSO <sub>4</sub>		The 95th percentile of the data must be < 37 mg/L		
Inorganic Salts	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the data must be < 51 mg/L		
	MgCl <sub>2</sub>	The 95th percentile of the data must be < 36 mg/L		
	CaCl <sub>2</sub>	The 95th percentile of the data must be <105 mg/L		
	NaCl	The 95 <sup>th</sup> percentile of the data must be < 389 mg/L		
	CaSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be < 351 mg/L		
	EC	The 95 <sup>th</sup> percentile of the data must be < 85 mS/m (<111mS/m)		
Physical	рН	The $5^{\rm th}$ percentile of the data must be $6.5-8.0$ and the $95^{\rm th}$ percentile $8.0-8.8$		
variables	Temperature	Moderate change from the natural temperature range		
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 6.0 mg/L		
	Turbidity	Initiate baseline monitoring for this variable		
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 0.70 mg/L		
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.125 mg/L		
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be < 20 μg/L		
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 21 mg/m²		
	Ammonia	The 95 <sup>th</sup> percentile of the data must be ≤ 0.100 mg/L		
Tavias	Atrazine	The 95 <sup>th</sup> percentile of the data must be ≤ 100 ug/L		
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 3.0 mg/L)		
	Endosulfan	The 95 <sup>th</sup> percentile of the data must be ≤ 0.200 µg/L		

Table 5.12:	EWR12: Water Quality	y Ecological Specifications		
River: Vaal EWR 12: at Vermaasdrift Water quality monitoring site/gau				
	MgSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 37 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 51 mg/L		
	MgCl <sub>2</sub>	The 5 <sup>th</sup> and 95 <sup>th</sup> percentile of the data must be ≤ 51 mg/L		
Inorganic Salts	CaCl <sub>2</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 105 mg/L		
	NaCl	The 95 <sup>th</sup> percentile of the data must be ≤ 191 mg/L		
	CaSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 351 mg/L		

EC	The 95th percentile of the data must be ≤ 85 mS/m	
рН	The 5 <sup>th</sup> percentile of the data must be 7.5 to 8.0 and the 95th percentile 8.8 9.2	
Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 7.5 mg/L	
Turbidity	Vary by a small amount from the natural turbidity range	
TDS	The 95 <sup>th</sup> percentile data must be ≤560mg/L	
Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 1.0 mg/L	
PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.125 mg/L	
Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be ≤ 30 µg/L	
Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 84 mg/m <sup>2</sup>	
Ammonia as Nitrogen	The 95 <sup>th</sup> percentile of the data must be ≤ 0.1 mg/L	
Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L	
Cyanide	The 95th percentile data must be ≤ 0.05 mg/L	
Aluminium	The 95th percentile data must be ≤ 0.1 mg/L	
Sulphate	The 95th percentile data must be ≤ 160 mg/L	
Magnesium	The 95th percentile data must be ≤ 33 mg/L	
	pH  Dissolved oxygen  Turbidity  TDS  Total inorganic Nitrogen (TIN)  PO <sub>4</sub> -P  Chl-a phytoplankton  Chl-a periphyton  Ammonia as Nitrogen  Fluoride  Cyanide  Aluminium  Sulphate	

Table 5.13: EWR13: Water Quality Ecological Specifications

Table 5.13:	EVVR13: Water Quality	/ Ecological Specifications		
River: Vaal		EWR 13: At Regina Bridge	Water quality monitoring site/gauge: C2H022	
	MgSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 37 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 51 mg/L		
Inorganic Salts	MgCl <sub>2</sub>	The 95th percentile of the data	The 95 <sup>th</sup> percentile of the data must be ≤ 51 mg/L	
morganic Saits	NaCl	The 95th percentile of the data	The 95th percentile of the data must be ≤ 191mg/L	
	CaCl <sub>2</sub>	The 95th percentile of the data	The 95th percentile of the data must be ≤ 105 mg/L	
	CaSO <sub>4</sub>	The 95th percentile of the data	must be ≤ 351 mg/L	
	EC	The 95th percentile of the data	must be 85 mS/m	
	рН	The 5th percentile of the data i	must be 7.5 to 8.0, and the 95th percentile 8.0 to	
Physical	Temperature	Small deviation from the natural temperature range		
variables	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 6 mg/L		
	Turbidity	Vary by a small amount from the natural turbidity range		
	TDS	The 95 <sup>th</sup> percentile data must be ≤ 560 mg/L		
Nutrients	Total inorganic Nitrogen (TIN)	The 50th percentile of the data must be ≤ 4.0 mg/L		
	PO <sub>4</sub> -P	The 50th percentile of the data must be ≤ 0.125 mg/L		
Response	Chl-a phytoplankton	The 50th percentile of the data	must be ≤ 30 μg/L	
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 84 mg/m <sup>2</sup>		
	Ammonia	The 95th percentile of the data	must be ≤ 0.0438 mg/L	
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L		
OXICS	Aluminium	The 95th percentile data must be ≤ 0.1 mg/L		
	Cyanide	The 95th percentile data must	be ≤ 0.05 mg/L	
nargania la -	Magnesium	The 95th percentile data must	be ≤ 33 mg/L	
norganic ions	Sulphate	The 95th percentile data must be ≤ 160 mg/L		

Table 5.14: EWR14: Water Quality Ecological Specifications

Table 5.14:	EVVK14. Water	lanty Ecological Specifications		
River: Vals		EWR 14: Proklameersdrift Water quality monitoring site/gauge: C6H007		
	MgSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 37 mg/L		
	Na <sub>2</sub> SO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 51 mg/L		
Inorganic Salts	MgCl <sub>2</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 51 mg/L		
	CaCl <sub>2</sub>	The 95th percentile of the data must be ≤ 191mg/L		
	NaCl	The 95th percentile of the data must be ≤ 105 mg/L		
	CaSO <sub>4</sub>	The 95th percentile of the data must be ≤ 351 mg/L		
Physical	EC	The 95 <sup>th</sup> percentile of the data must be ≤ 85 mS/m		

variables	рН	The 5th percentile of the data must be 5.5 to 6.0 and the 95th percentile 8. 9.2	
	Temperature	Small deviation from the natural temperature range	
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 8 mg/L	
	Turbidity	Vary by a 10% from the natural turbidity range	
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 0.7 mg/L	
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.125mg/L	
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be ≤ 30ug/L	
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 84 mg/m <sup>2</sup>	
	Ammonia	The 95 <sup>th</sup> percentile of the data must be ≤ 0.073 mg/L	
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L	

Table 5.15: EWR15: Water Quality Ecological Specifications

River: Vet		EWR 15: at Fisantkraal	Water quality monitoring site/gauge: C4H004	
	MgSO <sub>4</sub>	The 95th percentile of the	The 95th percentile of the data must be ≤ 37 mg/L	
Inorganic Salts	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	The 95th percentile of the data must be ≤ 51 mg/L	
	MgCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 36 mg/L	
	CaCl <sub>2</sub>	The 95th percentile of the	The 95th percentile of the data must be ≤ 69 mg/L	
	NaCl	The 95th percentile of the	data must be ≤ 191 mg/L	
	CaSO <sub>4</sub>	The 95th percentile of the	data must be ≤ 351 mg/L	
	EC	The 95th percentile of the	data must be ≤ 55 mS/m	
Physical	рН	The 5th percentile of the data must be $6.5-8.0$ , and the 95th percentile $8.0-8.8$		
variables	Temperature	Small deviation from the natural temperature range		
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 6.0 mg/L		
	Turbidity	Vary by a small amount from the natural turbidity range		
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 0.7 mg/L		
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.058 mg/L		
Response	Chl-a phytoplankton	The 50th percentile of the	data must be ≤ 25 μg/L	
variables	Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 84 mg/m <sup>2</sup>		
Toxics	Ammonia	The 95 <sup>th</sup> percentile of the data must be ≤ 0.044 mg/L		
IOXICS	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L		
norganic ions	Sulphate	The 95th percentile data n	nust be ≤ 120 mg/L	
norganic ions	Chloride	The 95th percentile data must be ≤ 100 mg/L		

Table 5.16: EWR16: Water Quality Ecological Specifications

River: Vaal		EWR 16: Downstream Bloemhof Dam	Water quality monitoring site/gauge: C9H021
	MgSO <sub>4</sub>	The 95th percentile of the	data must be ≤ 28 mg/L
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	data mu <b>s</b> t be ≤ 51 mg/L
In argania Calta	MgCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 30 mg/L
Inorganic Salts	CaCl <sub>2</sub>	- The 95th percentile of the	data must be ≤ 69 mg/L
	NaCl	The 95th percentile of the of	data must be ≤ 191mg/L
	CaSO <sub>4</sub>	The 95 <sup>th</sup> percentile of the data must be ≤ 351 mg/L	
	EC	The 95th percentile of the data must be ≤ 55 mS/m	
Physical	рН	The 5th percentile of the data must be between 6.5 to 8.0, and the 95th percentile between 8.0 to 8.8	
variables	Temperature	Small deviation from the natural temperature range	
	Dissolved oxygen	The 5 <sup>th</sup> percentile of the data must be ≥ 6 mg/L	
	Turbidity	Vary by a small amount from the natural turbidity range	
Nutrients	Total inorganic Nitrogen (TIN)	The 50 <sup>th</sup> percentile of the data must be ≤ 0.25 mg/L	

Chl-a phytoplankton	T. FOU	
orn or projection materi	The 50th percentile of the data must be ≤ 30 µg/L	
Chl-a periphyton	The 50 <sup>th</sup> percentile of the data must be ≤ 84 mg/m <sup>2</sup>	
Ammonia as Nitrogen	The 95th percentile of the data must be ≤ 0.073 mg/L	
Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 3.0 mg/L	
Atrazine	The 95 <sup>th</sup> percentile data must be ≤ 0.079 mg/L	
Endosulfan	The 95 <sup>th</sup> percentile data must be ≤ 0.15 µg/L	
	Chl-a periphyton Ammonia as Nitrogen Fluoride Atrazine	Chl-a periphyton The $50^{th}$ percentile of the data must be $\leq 84 \text{ mg/m}^2$ Ammonia as Nitrogen The 95th percentile of the data must be $\leq 0.073 \text{ mg/L}$ Fluoride The $95^{th}$ percentile of the data must be $\leq 3.0 \text{ mg/L}$ Atrazine The $95^{th}$ percentile data must be $\leq 0.079 \text{ mg/L}$

Table 5.17: EWR17: Water Quality Ecological Specifications

River: Harts		EWR 17: Lloyds weir	Water quality monitoring site/gauge: C3H016
	MgSO <sub>4</sub>	The 95th percentile of the	
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the	data must be ≤ 51 mg/L
l	MgCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 51 mg/L
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the	data must be ≤ 105 mg/L
	NaCl	The 95th percentile of the	data must be ≤ 389 mg/L
	CaSO <sub>4</sub>	The 95th percentile of the	data must be ≤ 351 mg/L
	EC	The 95th percentile of the	data must be ≤ 85 mS/m
Physical	рН	The 5 <sup>th</sup> percentile of the d 8.8	ata must be 6.5 to 8.0 and the 95 <sup>th</sup> percentile 8.0 to
variables	Temperature	Small deviation from the r	natural temperature range
	Dissolved oxygen	5th percentile of the data r	nust be ≥ 6.0 mg/L
	Turbidity	Vary by a small amount fr	om the natural turbidity range
Nutrients	Total inorganic Nitrogen (TIN)	The 50th percentile of the	data must be ≤ 1.0 mg/L
	PO <sub>4</sub> -P	The 50th percentile of the	data must be ≤ 0.025 mg/L
Response	Chl-a phytoplankton	The 50th percentile of the	data must be ≤ 30ug/L
variables	Chl-a periphyton	The 50th percentile of the	data must be ≤ 84 mg/m²
Toxics	Ammonia as Nitrogen	The 95th percentile of the	data must be ≤ 0.073 mg/L
IOAIGS	Fluoride	The 95th percentile of the	data must be ≤ 1.5 mg/L

Table 5.18: EWR18: Water Quality Ecological Specifications

Table 5.16:	LIVIN 10. Water Quality	Ecological Specifications
River: Vaal		EWR 18: at Schmidtsdrift Water quality monitoring site/gauge: C9H024
	MgSO <sub>4</sub>	The 95th percentile of the data must be ≤ 28 mg/L
	Na <sub>2</sub> SO <sub>4</sub>	The 95th percentile of the data must be ≤ 51 mg/L
In average Calta	MgCl <sub>2</sub>	The 95th percentile of the data must be ≤ 30 mg/L
Inorganic Salts	CaCl <sub>2</sub>	The 95th percentile of the data must be ≤ 105 mg/L
	NaCl	The 95th percentile of the data must be ≤ 191 mg/L
	CaSO <sub>4</sub>	The 95th percentile of the data must be ≤ 351 mg/L
	EC	The 95th percentile of the data must be ≤ 85 mS/m
Physical	рН	The 5th percentile of the data must be 6.5 to 8.0 and the 95th percentile 8.0 to 8.8
variables	Dissolved oxygen	The 5th percentile of the data must be ≥ 4 mg/L
	Turbidity	The 5th percentile of the data must be ≥ 4 mg/L
Nutrients	Total inorganic Nitrogen (TIN)	The 50th percentile of the data must be ≤ 0.7 mg/L
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.125 mg/L
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be ≤ 30 µg/L
variables	Chl-a periphyton	The 50th percentile of the data must be ≤ 84 mg/m²
Tanias	Ammonia as Nitrogen	The 95th percentile of the data must be ≤ 0.073 mg/L
Toxics	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 1.5 mg/L

Table 5.19: EWR WA1: Water Quality Ecological Specifications

River: Waterval		EWR WA1: Waterval_1	Water quality monitoring site/gauge: C1H036
	EC	The 95th percentile of the	data must be ≤ 85 mS/m
Physical variables	рH	The 5th percentile of the do to 10.0	ata must be 5.0 to 5.6 and the 95th percentile 9.2
	Dissolved oxygen	The 5th percentile of the d	ata must be ≥ 6.5 mg/L
Nutrients	Nitrate (NO <sub>3</sub> ) + Nitrite (NO <sub>2</sub> )	The 50th percentile of the	data must be ≤ 4.0 mg/L
	PO <sub>4</sub> -P	The 50th percentile of the	data must be ≤ 0.125 mg/L
Response	Chl-a phytoplankton	The 50th percentile of the	data must be ≤ 30 μg/L
variables	Chl-a periphyton	The 50th percentile of the	data must be ≤ 84 mg/m²
	Ammonia as Nitrogen	The 95th percentile of the	data must be ≤ 0.1 mg/L
	Fluoride	The 95th percentile of the	data must be ≤ 3.0 mg/L
	Atrazine	The 95th percentile data m	ust be ≤ 0.1 mg/L
	Endosulfan	The 95th percentile data m	ust be ≤ 0.20 μg/L
	Cadmium (hard)	The 95th percentile data m	ust be ≤ 0.005 mg/L
Toxics	Chromium (VI)	The 95th percentile data m	ust be ≤ 0.2 mg/L
TOXICS	Copper (hard)	The 95th percentile data m	ust be ≤ 0.008 mg/L
	Manganese	The 95th percentile data m	ust be ≤ 1.3 mg/L
	Lead (hard)	The 95th percentile data m	ust be ≤ 0.013 mg/L
	Mercury	The 95th percentile data m	ust be ≤ 0.0017 mg/L
	Selenium	The 95th percentile data m	ust be ≤ 0.030 mg/L
	Zinc	The 95th percentile data m	ust be ≤ 0.036 mg/L

Table 5.20: EWR WA2: Water Quality Ecological Specifications

Table 5.20:	EWR WA2: Water Qua	lity Ecological Specifications
River: Waterval		EWR WA2: Waterval_2 Water quality monitoring site/gauge: C1H030
	EC	The 95th percentile of the data must be ≤ 85 mS/m
Physical variables	рН	The 5th percentile of the data must be 5.0 to 5.6 and the 95th percentile 9.2 to 10.0
	Dissolved oxygen	The 5th percentile of the data must be ≥ 6.5 mg/L
Nutrients	Nitrate (NO <sub>3</sub> ) + Nitrite (NO <sub>2</sub> )	The 50th percentile of the data must be ≤ 4.0 mg/L
	PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the data must be ≤ 0.125mg/L
Response	Chl-a phytoplankton	The 50 <sup>th</sup> percentile of the data must be ≤ 30 µg/L
variables	Chl-a periphyton	The 50th percentile of the data must be ≤84 mg/m²
	Ammonia as Nitrogen	The 95th percentile of the data must be ≤ 0.1 mg/L
	Fluoride	The 95 <sup>th</sup> percentile of the data must be ≤ 3.0 mg/L
	Atrazine	The 95 <sup>th</sup> percentile data must be ≤ 0.1 mg/L
	Endosulfan	The 95 <sup>th</sup> percentile data must be ≤ 0.20 µg/L
	Cadmium (hard)	The 95 <sup>th</sup> percentile data must be ≤ 0.005 mg/L
Toxics	Chromium (VI)	The 95 <sup>th</sup> percentile data must be ≤ 0.2 mg/L
TOXICS	Copper (hard)	The 95 <sup>th</sup> percentile data must be ≤ 0.008 mg/L
	Manganese	The 95 <sup>th</sup> percentile data must be ≤ 1.3 mg/L
	Lead (hard)	The 95 <sup>th</sup> percentile data must be ≤ 0.013 mg/L
	Mercury	The 95 <sup>th</sup> percentile data must be ≤ 0.0017 mg/L
	Selenium	The 95 <sup>th</sup> percentile data must be ≤ 0.030 mg/L
	Zinc	The 95 <sup>th</sup> percentile data must be ≤ 0.036 mg/L

Table 5.21: EWR S1: Water Quality Ecological Specifications

River: School	nspruit	EWR S1: downstream Schoonspruit Eye	Water quality monitoring site/gauge: No site in vicinity
	EC	The 95th percentile of the	e data must be ≤ 55 mS/m
Physical variables	рН	The 5th percentile of the c to 8.8	data must be 5.6 to 5.9 and the 95th percentile 8.5
	Dissolved oxygen	The 5th percentile of the	lata must be ≥ 7.0 mg/L
Nutrients	Nitrate (NO <sub>3</sub> ) + Nitrite (NO <sub>2</sub> )	The 50th percentile of the	data must be ≤ 2.5 mg/L
	PO <sub>4</sub> -P	The 50th percentile of the	data must be ≤ 0.02 mg/L
Response	Chl-a phytoplankton	The 50th percentile of the	data must be ≤ 10 μg/L
variables	Chl-a periphyton	The 50th percentile of the	data must be ≤ 12 mg/m²

Table 5.22: EWR S3: Water Quality Ecological Specifications

nspruit	EWR S3: downstream Taaibosspruit and Rietspruit confluence	Water quality monitoring site/gauge: No active site
EC	The 95th percentile of the	data must be ≤ 70 mS/m
рН	The 5th percentile of the date	ata must be 5.2 to 5.4 and the 95th percentile 9.3
Dissolved oxygen	The 5th percentile of the da	ata mu <b>s</b> t be ≥ 6.5 mg/L
Nitrate (NO <sub>3</sub> ) + Nitrite (NO <sub>2</sub> )	The 50th percentile of the	data must be ≤ 2.5 mg/L
PO <sub>4</sub> -P	The 50 <sup>th</sup> percentile of the d	ata must be ≤ 0.125 mg/L
Chl-a phytoplankton	The 50th percentile of the d	ata mu <b>s</b> t be ≤ 20 μg/L
Chl-a periphyton	The 50th percentile of the	data must be ≤ 21 mg/m²
	EC pH Dissolved oxygen Nitrate (NO <sub>3</sub> ) + Nitrite (NO <sub>2</sub> ) PO <sub>4</sub> -P Chl-a phytoplankton	EC The 95th percentile of the The 5th percentile of the date of the Solid percentile of the date of the of the Solid percentile of the date of the date of the Solid percentile of the date of the Solid percentil

Table 5.22: EWR S4: Water Quality Ecological Specifications

River: Schoons	pruit	EWR S4: downstream Johan Neser Dam	Water quality monitoring site/gauge: C2H073
	EC	The 95th percentile of the	data must be ≤ 85 mS/m
Physical variables	pH	The 5th percentile of the co	ata must be 5.2 to 5.4 and the 95th percentile 9.3
	Dissolved oxygen	The 5th percentile of the of	ata must be ≥ 6.5 mg/L
Nutrients	Nitrate (NO <sub>3</sub> ) + Nitrite (NO <sub>2</sub> )	The 50th percentile of the	data must be ≤ 2.5 mg/L
	PO <sub>4</sub> -P	The 50th percentile of the	data must be ≤ 0.125 mg/L
Response	Chl-a phytoplankton	The 50th percentile of the	data must be ≤ 20 μg/L
variables	Chl-a periphyton	The 50th percentile of the	data must be ≤ 21 mg/m²
Inorganic ions	Sulphate	The 95th percentile of the	data mu <b>s</b> t be ≤ 200 <b>m</b> g/L
	Ammonia as Nitrogen	The 95th percentile of the	data must be ≤ 0.073 mg/L
	Aluminium	The 95th percentile of the	data must be ≤ 0.1 mg/L
	Manganese	The 95th percentile of the	data must be ≤0.250 mg/L
Tavias	Uranium	The 95th percentile of the	data must be ≤0.03 mg/L
Toxics	Iron	The 95th percentile of the	data must be ≤0.25 mg/L
	Chromium (VI)	The 95th percentile data m	ust be ≤ 0.2 mg/L
	Copper (hard)	The 95th percentile data m	ust be ≤ 0.008 mg/L
	Cyanide (free)	The 95th percentile data m	ust be ≤ 0.050 mg/L

# 6. PROPOSED RESERVE FOR GROUNDWATER

**Table 6.1** below presents the Groundwater Reserve for the Vaal Catchment area derived using the Groundwater Resources Directed Measures (GRDM) methodology.

A groundwater quantity ranking approach was applied using the stress index (SI) principle. The stress index provides a measure of the groundwater balance in a groundwater unit (in this case the quaternary catchment) indicating the fraction of how much of the groundwater recharge [volume] is used, *i.e.* (i) amount required for BHN (25 l/c/d), (ii) the volume of groundwater supporting the base flow (i.e. the baseflow requirement of the quaternary catchment), and (iii) the actual groundwater use/abstraction. When the SI is =/> 1.00 it means that all the recharged groundwater is "allocated". The "safe" cut off is 0.65 of 65% of the groundwater recharge. SI is an indicator of the groundwater use impact.

The prescribed GRDM algorithm was used and an "allocable groundwater" volume (MCM/a) was calculated. The potential impact of groundwater abstraction on the surface water component in the quaternary catchments is listed. According to the GRDM algorithm for calculating the "groundwater component" of a water resource unit (*i.e.* in this case it's the quaternary catchment). This algorithm is explained in the GRDM protocols, and it indicates the component of the annual recharge that is still available after BHN, baseflow requirements and the current water use is subtracted from the calculated groundwater recharge. SI is used as an indicator in a table format to sort and rank the dataset to highlight quaternary catchments where the groundwater balance is approaching over utilisation.

The groundwater quality for each quaternary catchment, where available in a data count of >9, was applied and the ranking of the groundwater quality is according to the guideline: "Quality of domestic water supplies Volume 1: Assessment Guide". 1998. Water Research Commission, the Department of Water Affairs and Forestry & the Department of Health.

### NOTE:

- Class 0 This is ideal water quality, suitable for lifetime use, with no adverse health effects on the user. This class is essentially the same as the target water quality range in the 2<sup>nd</sup> edition of the South African Water Quality Guidelines for Domestic Use (DWAF, 1996).
- Class I Water in this class is safe for lifetime use, but falls short of the ideal water quality in that there may be instances of adverse health effects, but these are usually mild, and overt health effects are almost sub-clinical and difficult to demonstrate. Water in Class I does not cause health effects under normal circumstances. Aesthetic effects may, however, be apparent.
- Class II Water in this class is defined as that where adverse health effects are unusual for limited short-term use. Adverse health effects may become more common particularly with prolonged use over many years, or with lifetime use. This class represents water suitable for short-term or emergency use only, but not necessarily suitable for continuous use over a lifetime.
- Class III This water has constituents in a concentration range where serious health effects might be anticipated, particularly in infants or elderly people with short-term use, and even more so with longer term use. The water in this class is not suitable for use as drinking water without adequate treatment to shift the water into a lower and safer class.

Table 6.1: Groundwater Resource Directed Measures (GRDM) for the Vaal River Catchment

		1		T																					T													Г	T			T			T	T
Groundwater Water Quality Reserve specification: Class*	WATER QUALITY		Limited hydrochemistry data	I imited hydrochemistry data	Limited hydrochemistry data	limited hydrochemietry data.	limited hydrochomistry data.	Limited hydrochemistry data	Limited hydrochemistry data.	Class 2	Limited hydrochemistry data	No hydrochemistry data.	No hydrochemistry data.	Limited hydrochemistry data	No hydrochemistry data.	No hydrochemistry data.	No hydrochemistry data.	Class 2	Limited hydrochemistry data	No hydrochemistry data.	Limited hydrochemistry data	No hydrochernistry data.	Nohydrochemistry data.	Limited hydrochemistry data	No hydrochemistry data.	Limited hydrochemistry data	No hydrochemistry data.	Limited hydrochemistry data	No hydrochemistry data.	No hydrochemistry data.	No hydrochemistry data.	Limited hydrochemistry data	Limited hydrochemistry data	Limited hydrochemistry data	Limited hydrochemistry data	Class 0	Class 0*	Class 1*	Class 0	Class 0*	Class 1	Class 2*	Class.1	Class 1*	Class 0*	Class 1
Impact of groundwater abstraction on surface water*			Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low	Low
GRDW Classification*			Moderate to High	Moderate to High	Moderate to High	Moderate to High	Moderate to High	Moderate to High	Moderate to High	Moderate to High	Moderate	Moderate	Moderate	Moderate	Low	Moderate	Moderate to High	Moderate to High	Moderate	Moderate to High	Moderate to High	High	Low	Moderate to High	Moderate to High	Moderate to High	Moderate	Moderate to High	Moderate	Moderate	Modarate	Moderate	Low	LOW	High	High	Critical	High	Critical	High	High	Moderate to High	High	High	High	Crítical
Allocable Ground- water Total (Mm³/a)	BLE		4.93	3.53	3.16	2.64	8.31	6.14	2.84	7.73	7.78	2.55	7.21	5.87	3.39	3.49	3.51	5.79	3.65	5.63	4.44	0.72	2.75	4.14	5.57	4.90	4.99	6.97	7.39	2.07	4.62	3.21		5.68				0.38	0.00	0.45	2.68	1.89	1.49	2.15	0.28	0.53
Exploitation.	USE & BALANCE & ALLOCABLE		0.32	0.30	0.31	0.30	0.31	0.26	0.27	0.31	0.32	0.33	0.33	0.33	0.32	0.33	0.31	0:30	0.32	0.30	0.34	0.33	0.31	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.29	0.32	0.33	0.34	0.33	0.44	0.41	0.35	0.36	0.42	0.42	0.41	0.47	0.44	0.35
Ground- water Balance (Mm³/a)	ISE & BALAN		15.37	11.93	10.09	8.75	26.59	23.38	10.49	24.90	24.58	7.85	22.17	18.06	10.50	10.74	11.16	19.11	11.58	19.05	12.90	2.17	8.91	12.27	16.63	15.09	15.35	21.33	22.74	15.61	14.20	10.97	13.14	17.02	1.33	1.89	0.29	0.93	0.01	1.26	6.38	4.48	3.64	4.61	0.63	1.52
Ground- water Use (Mm³/a)	2		0.00	60.0	0.14	0.17	1.26	0.39	0.22	1.38	0.48	0.31	0.49	0.43	0.00	0.13	0.17	3.78	0.26	0.36	0.20	80.0	0.17	60.0	3.77	0.21	0.27	0.04	0.11	0.01	0.03	0.01	0.02	00.00	0.23	0.13	0.84	0.22	0.59	0.03	1.41	1.47	0.03	2.34	0.91	0.05
Total Reserve (Mm³/a)			23.56	14.47	11.93	8.13	18.78	15.90	6.30	13.88	11.09	3.31	10.08	4.89	1.60	3.53	7.33	98.6	5.03	10.05	8.10	9.01	0.59	7.57	11.59	11.88	6.31	14.59	9.82	6.32	5.02	3.16	2.20	20.0	8.14	1.83	7.43	9.06	8.91	8.09	11.77	5.27	11.05		10.59	8.48
Ground- water Component of Baseflow (Mm³/a)	RVE		23.54	14.45	11.92	8.12	18.56	15.61	6.29	13.57	11.06	3.28	10.02	4.54	1.59	3.51	7.29	9.37	5.01	10.02	8.04	8.86	0.58	7.55	11.57	11.85	6.29	14.54	9.80	6.31	5.01	3.02	2.18	3.77	1.97	(./5	5.78	7.69	8.26	8.07	7.04	3.11	10.17			7.48
Basic Human Needs (Mm³/a)	RESERVE		0.02	0.02	0.01	0.01	0.22	0.29	0.01	0.31	0.03	0.03	90.00	0.30	10.0	0.02	0.04	0.49	0.02	0.03	90.0	0.15	0.01	0.02	0.02	0.03	0.02	0.05	0.02	0.01	0.01		20.02	Ī	Ī											1.00
Population			1955	2142	1277	965	23889	31634	1460	33924	3106	2970		38300								40											1000													109440
%WAP			7.3		6.5	8.5	5.8					T	1		Ť	Ť	1	7		T	7	1	T				1	T	5.2	T		T	7.4	T	Ť	T	1	1		1	T		1	1	1	2.4
Recharge (Mm³/a)	(Average Annual)		38.93	26.49	22.16	17.05	46.63	39.67	17.01	40.16	36.15	11.47	32.74	42.40			18.66			1		,							32.67			14.14								Ī						7.01
MAP (mm)	A A		743	705	765	702	697	705	628	664	658		6/9								640								869	Ī					Ī	1	1						1	1		655
Area (kim²)	Area				448.8	371.7	1154.7		-	$\rightarrow$			946.9	1	T		7	$\neg$	T	1		1			_	+	$\top$		894.6		1	1	+	1	1	+	1	$\top$		1	7	7	$\top$	1	$\neg$	440.2
Quaternary		UPPER VAAL					C11E					XI.S			Ī														CISD									CZ1E		1				Ī		CZZF 4

Impact of groundwater Groundwater Water Quality abstraction Reserve specification: on surface Glass*	Low Limited hydrochemistry data	Moderate Class 0+: None	Moderate Class 1*: None	Low Class 0*: None	Low No hydrochemistry data.	Low Class 0*	Low Class 1	Low Class 0*	Low Class 1*	Moderate Class 0◆		erate	LOW Class 1					Low No hydrocheruistry data.		erate				Low No hydrochemistry data.	Low I imited hydrochemietra data.			Low No hydrochemistry data.											Low No hydrochemistry data.							
GRDM Classification <sup>#</sup>	Natural	High	High	Moderate to High	Low	Moderate	High	Moderate to High	Critical	Low	Moderate	Moderate to High	High	High	High Hotel	Moderate to High	Moderate to High	Moderate to High	Moderate to High	Critical	Moderate to High	Moderate to High	Low	Moderate to High	Moderate to riight	Natural	Natural	Moderate to High	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	high	Moderate	Moderate	Moderate to High	Moderate	Moderate		1
Allocable Ground- water Total (Mm³/a)	8.23	0.81	1.68	3.22	2.02	6.49	2.28	6.54	5.06	13.78	7.67	2.45	4 70	2 03	2 55	4.69	1.83	1.59	4.17	0.21	3.38	1.96	3.43	2.20	0.00	7.55	5.25	1.85	3.48	4.31	3.27	3.16	5.11	6.76	2.76	6.26	3.90	3.16	2.86	4.25	3.13	1.24	3.82	7.90		
Exploi- tation Factor <sup>1</sup>	0.33	0.43	0.42	0.34	0.33	0.34	0.32	0.49	0.49	0.44	0.48	0.48	0.44	0.43	0.38	0.35	0.30	0.32	0:30	0.31	0.32	0.31	0:30	0.30	0.37	0.3	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.35	0.40	0.31	0.31	0.30	0.28	0.26	0.25	0.25	0.30	0.32		
Ground- water Balance (Mm³/a)	25.28	1.90	3.98	9.54	6.22	19.07	7.19	13.42	10.32	31.21	15.84	5.12	0.07	5.03 R 64	8.84	13.21	6.09	4.90	13.78	99.0	10.61	6.43	11.43	7.29	26.90	21.66	16.77	7.04	13.97	15.33	11.33	12.88	17.21	19.11	6.99	20.23	12.44	10.61	10.17	16.63	12.53	4.88	12.83	24.33		
Ground- water Use (Mm³/a)	0.47	0.07	0.24	0.34	0.12	0.40	09.0	4.93	34.23	0.28	2.32	0.27	0.03	0.20	0.05	0.08	0.03	0.03	0.10	0.35	60.0	0.04	90.0	0.05	1 0 0	0.10	0.07	20.0	0.16	0.04	0.01	60.0	0.19	0.07	0.03	0.10	0.05	0.11	1123	0.21	0.24	0.11	0.05	0.39		
Total Reserve (Mm³/a)	0.02	7.38	11.03	8.39	1.05	8.16	15.34	7.44	11.93	15.89	9.02	7.04	12.35	17.07	15.95 15.86	13.15	3.76	3.38	8.46	45.14	9.16	5.90	1.39	5.00	10.34	0.04	0.04	5.28	5.37	5.36	2.68	5.17	3.30	12.09	2.93	10.27	4.56	4.74	10.95	7.39	3.46	1.69	3.56	7.00		
Ground- water Component of Basseflow (Mm <sup>3</sup> /a)	0.00	4.81	10.89	7.86	1.04	8.14	14.95	6.53	11.34	15.87	9.01	6.96	21.72	16.70	15.86	13.14	3.76	3.38	8.27	42.98	9.12	5.89	1.38	4.99	10.30	0.00	0.00	5.27	5.35	5.34	2.67	5.16	3.29	12.06	2.91	9.91	4.54	4.72	10.93	7.26	3.42	1.52	3.55	6.91		
Basic Human Needs (Mm³/a)	0.02	2.57	0.14	0.53	0.01	0.02	0.39	0.91	0.59	0.01	0.01	0.08	0.23	0.01	000	0.01	0.00	0.00	0.19	2.16	0.04	0.01	0.01	0.01	0.01	0.03	0.04	0.01	0.02	0.02	0.01	0.01	0.01	0.03	0.02	0.36	0.02	0.02	0.02	0.13	0.04	0.17	LU.U	0.09		
Population	2596	282162	14856	58152	1028	2152	42653	99677	64933	2373	1605	8385	22228	7003	303	1374	230	216	21029	236987	3855	1227	1496	793	2008	1303	4736	978	1849	1725	827	1086	1537	3635	2141	39056	1761	1918	2266	14040	4173	18257	943	9691		-
% MAP	5.1		3.6	6.5	4.7	6.4	3.6		6.7	6.9	Ħ	1		0.4	Ť			5.8				5.4	1	1	Ť	Ť	1	5.4						1	7	5.6	1	1	1	T	1	T	8.4	T		4.40
Recharge (Mm³/a)	25.77	9.35	15.25	18.27	7.39	27.63	23.13	25.79	35.84	47.38	27.18	12.43	19.05	24.44	22 72	26.44	9.88	8.31	22.34	46.15	19.86	12.37	12.88	12.34	30.87	20.02	16.88	12.39	19.50	20.73	14.02	18.14	20.70	31.27	9.95	30.60	17.05	15.46	32.35	24.23	16.23	6.68	75.53	31.72		40.0
MAP (mm)	613	639	633	644	612	619	609	664	631	605	297	604	020	642	210	763	730	735	658	892	722	638	612	623	740	670	099	646	623	999	639	655	614	692	899	663	650	654	637	647	646	641	644	639		0000
Area (km²)	830.4	454.2	668.7	433.8	258.0	701.1	1068.7	510.1	850.0	1323.6	613.1	451.2	890.3	1244.0	3010	575.5	249.7	194.8	642.4	688.0	434.5	357.8	391.6	359.1	4004 4	584.7	493.0	353.1	571.6	622.1	483.1	580.3	782.1	745.5	250.5	827.5	464.6	426.0	874.8	694.9	546.7	221.5	825.4	1100.0	_	0000
Quaternary	C22G	С22Н	C22J	C22K	C23A	C23B	C23C	C23D	C23E	C23F			CZ3J	Cool		C81B	C81C		C81E		C81G				CBTL	Calim	C82B	C82C	C82D	C82E	C82F							C83E	CB3F				CB3K	_	LE VAA	4700

Recharge (Mm³/a)		0	ation	Basic Human Needs (Mm³/a)	Ground- water Component of Baseflow (Mm³/a)	Total Reserve (Mm³/a)	Ground- water Use (Mm³/a)	Ground- water Balance (Mm³/a)	Exploitation Factor	Allocable Ground- water Total (Mm³/a)		Impact of groundwater abstraction on surface	Groundwater Water Quality Reserve specification: Class*
16.31	417			0.29	3.55	3.84	5.1	7.4	0.45	3.33	Moderate to High	Low	Class 3*
96.98			25 663	0.23	13.09	13.3	14.9	68.76	0.48	33.24	Low	Moderate	Class 1
5.88	0	6.03	100000	0.03	10.17	10.84	7.51	9.14	0.45	4.14	Hich	Low	Class 1
55.91	100		00	0.27	13.63	13.90	1.30	40.71	0.46	.18.87	Moderate	Low	Class 1
11.75	2			0.19	9.01	9.20	0.3	2.3	0.45	1.01	High	Low	Class 0
10.81	2	2.24 5	5 225	0.05	3.64	3.69	1.4	5.7	0.42	2.41	Moderate to High	Negligible	Class 1*
22.31	-	1.88	00	0.16	10.15	10.31	080	11.20	0.41	4.57	Moderate to High	Negligible	Class 0
12.49	2	2.67	2 998	0.03	2.88	2.91	0.5	9.1	0.38	3.49	Moderate	Negligible	Class 0*
18.16	-	1.89 6	63 942	0.58	4.45	5.03	9.0	12.5	0.35	4.34	Moderate	Negligible	Class 3
7.02	-	1.84	5004.00	60.0	5.76	5.85	08.0	0.37	0.38	0.14	Critical	Negligible	Class 2
8.74	-	1.21	60167.00	79.0	1.74	2.41	09.0	5.73	0.39	2.26	Moderate	Negligible	Limited hydrochemistry data
8.3	-	1.01	10597.00	0.1	1.2	1.3	1.9	5.1	0.34	1.76	Moderate to High	Negligible	Class 2
10.48	0	0.96	3706.00	90.0	3.24	3.30	09.0	6.58	0.34	2.22	Moderate to High	Negligible	Class 0*
9.04	-	1.41 5	54136.00	0.74	2.66	3.40	1.10	4.54	0.35	1.60	Moderate to High	Low	Class 2
9.51	-	1.58	20033.00	0.27	3.06	3.33	0.40	5.78	0.37	2.15	Moderate to High	Low	Limited hydrochemistry data
10.09	-	1.55	21 292	0.19	3.05	3.24	0.3	9.9	0.42	2.74	Moderate to High	Low	Limited hydrochemistry data
4.94	0	0.78 2	29 024	0.26	2.09	2.35	0.3	2.3	0.41	0.93	High	Negligible	Class 1*
0.62	0	0.30	2 629	0.02	2.75	2.77	0.1	2.3	0.38	0.84	High	Negligible	Limited hydrochemistry data
0.56	0	0.20	8 630	0.08	0.01	60.0	0.2	0.3	0.37	0.10	Critical	Negligible	No hydrochernistry data
0.29	0		130.00	0.00	0.24	0.24	0.1	0.1	0.37	0.02	Critical	Negligible	No hydrochernistry data
2.32	9	7	8 669	0.08	0.78	0.86	0.5	1.3	0.33	0.42	Critical	Negligible	No hydrochervistry data
2.16		7	11 390	0.10	0.90	1.00	0.1		0.34	0.36	Critical	Negligible	No hydrochemistry data
8.77	, ,	2.00	5 110	0.05	7.24	7.29	0.3	1.2	0.37	0.44	Critical	Low	Limited hydrochemistry data
0.10	-		902	0.02	4.00	4.00	0.00	7 7	0.30	0.28	Critical	Low	No hydrochenystry data
1 74	-	Ť	24 000	00.00	24.70	4.04 2.85	0.0	40	0.34	0.30	Critical	Low	No hydrochemistry data
200	-	1	8 150	0.20	2 10	200	0.0	0.4	0.33	0.13	Critical	Low	No hydrochemistry data
1.30	, 0	T	39 809	0.36	0.25	0.61	0.2	0.6	0.33	0.20	Critical	Low	No hydrochemistry data
0.82	-	T	6 876	0.06	1.64	1.70	0.2	1.1	0.35	0.38	Critical	Low	No hydrochemistry data
0.53	, 0	T	41 319	0.38	0.53	0.91	1.1	1.5	0.32	0.47	Critical	Low	No hydrochernistry data.
1.99	0		12 391	0.11	1.29	1.40	0.4	0.2	0.34	90.0	Critical	Low	Limited hydrochemistry data
0.67	0		587.00	0.01	0.16	0.17	6.0	0.4	0.37	0.15	Critical	Low	Limited hydrochemistry data
96.0	0	0.37	1 182	0.01	0.70	0.71	0.1	0.2	0.35	0.05	Critical	Low	Limited hydrochemistry data
3.37	O	0.47	26 707	0.24	1.98	2.22	0.3	6.0	0.32	0.27	Critical	Negligible	Limited hydrochemistry data
1.26	0	0.35 1	1 854	0.02	0.05	0.07	0.2	1.0	0.33	0.32	Critical	Negligible	Class 2*
3.17	0	0.74 9	9 364	60.0	1.04	1.13	0.3	1.7	0.30	0.51	High	Negligible	No hydrochemistry data
3.95	0	0.58 2	24 645	0.22	0.58	08.0	0.4	2.8	0.30	0.83	High	Negligible	No hydrochemistry data
10.01	-	1.84 2	2 340	0.02	7.68	7.70	0.2	2.1	0.35	0.75	High	Low	No hydrochemistry data
10.11	1	1.60	10 790	0.10	8.26	8.36	0.5	1.3	0.33	0.42	Critical	Low	Limited hydrochemistry data
5.51	0	0.91	8 469	0.08	3.64	3.72	0.4	1.4	0.40	0.55	High	Low	Limited hydrochemistry data
2.53	0	0.71 2	2 567	0.02	0.85	0.87	0.2	1.5	0.42	0.62	High	Low	Limited hydrochemistry data
2.76	0	0.74 7	7 788	70.0	1.12	1.19	9.0	1.0	0.40	0.39	Critical	Low	Class 0*
1.94	0	0.53 9	96 217	0.88	1.29	2.17	0.2	0.4	0.40	0.17	Critical	Low	Limited hydroc/remistry data
2.28	0	0.54	1 300	0.01	2.34	2.35	2.1	2.2	0.36	0.78	High	Low	Limited hydrock emistry data
2.69	0	0.42 6	6 274	90.0	0.25	0.31	0.3	2.1	0.34	0.71	High	Negligible	Limited hydrochemistry data
10.02	-			90.0	3.84	3.90	8.0	5.3	0.37	1.98	Moderate to High	Negligible	No hydrochemistry data
7.02	-			0.02	5.28	5.30	0.5	1.2	0.34	0.41	Critical	Low	Limited hydrochemistry data
121		4 47 8	R 715	0.06	3.53	3.59	0.4	0.8	0.34	0.28	Critical	l ow	No hydrochemistry data

	(Mm³/a)	MAP %	Population	Human Needs (Mm <sup>3</sup> /a)	water Component of Baseflow (Mm³/a)	Total Reserve (Mm³/a)	water Use (Mm³/a)	water Balance (Mm³/a)	Explol- tation Factor <sup>1</sup>	Ground- Water Total (Mm³/a)	GRDM Classification#	groundwater abstraction on surface	Groundwater Water Quality Reserve specification: Class*
5.92		1.08	4114	0.04	4.14	4.18	0.4	1.3	0.32	0.43	Critical	Low	No hydrochemistry dat
3.82		96.0	2 012	0.02	2.30	2.32	9.0	6.0	0.32	0.28	Critical	Low	Class 1
7.67		1.91	13 034	0.12	4.67	4.79	0.2	2.7	0.31	0.83	Moderate to High	Low	No hydrochemistry data
4.95		1.52	2 141	0.02	3.98	4.00	0.2	0.8	0.29	0.22	Critical	Low	No hydrochemistry data
7.15		1.37	2 745	0.03	3.91	3.94	0.3	2.9	0.33	0.97	High	Low	No hydrochemistry data
1.92		1.34	3 081	0.03	1.59	1.62	0.1	0.2	0.33	0.07	Critical	Low	No hydrochemistry data
6.45		2.14	3 602	0.03	3.99	4.02	0.2	2.2	0.39	0.86	High	Low	No hydrochemistry data
9.39		1.86	3 050	0.03	5.14	5.17	0.7	3.5	0.39	1.38	Moderate to High	Low	Limited hydrochemistry data
20.00		100	00,00	1									
32.68	2	7.00	28400	0.71	3.93	4.64	0.80	27.33	0.47	12.87	Low	Negligible	Class 2
20.59	6	2.00	4400	0.11	9.10	9.21	1.10	11.27	0.41	4.60	Moderate to High	Negligible	Class 2*
21.79	6	5.00	800	0.02	7.92	7.94	1.40	13.83	0.40	5.58	Moderate to High	Negligible	Class 2*
22.95	15	5.00	30400	0.76	5.34	6.10	09.0	16.09	0.31	5.06	Moderate	Negligible	Class 2*
37.91	31	5.00	65600	1.64	17.35	18.99	2.30	17.28	0.37	6.40	Moderate to High	Negligible	Class 2*
12.92	92	3.00	63600	1.59	5.75	7.34	1.40	3.99	0.33	1.32	High	Negligible	Class 2*
8.62	2	3.50	25200	0.63	4.55	5.18	1.10	2.81	0.36	1.01	High	Nealigible	Class 2*
31.22	22	9.00	123200	3.08	10.50	13.58	2.50	17.64	0.47	8.30	Moderate to High	Negligible	Class 2
15.24	24	3.50	<1000	0.00	6.49	6.49	0.80	8.75	0.35	3.03	Moderate to High	Negligible	Class 2
60.26	97	00.9	40000	1.00	10.65	11.65	3.30	47.61	0.49	23.41	Moderate	Negligible	Class 2
35.29	00	5.00	57600	1.44	7.84	9.28	1.10	24.57	0.43	10.67	Moderate	Negligible	Class 2*
8	36.55	5.00	17600	0.44	3.47	3.91	0.80	32.20	0.49	15.71	Low	Negligible	Class 2*
35	35.06	4.50	2400	90.0	3.43	3.49	0.97	31.51	0.41	12.99	Low	Negligible	Class 2*
9	16.81	3.50	11200	0.28	6.07	6.35	0.80	10.18	0.32	3.31	Moderate	Negligible	Class 1*
22	59.66	4.50	2600	0.07	20.10	20.17	1.10	39.42	0.33	13.19	Moderate	Negligible	Class 2*
33	33.55	4.00	10400	0.26	6.83	60.7	0.18	26.20	0.38	9.91	Moderate	Negligible	Class 2
27.83	83	4.00	22000	0.55	1.70	2.25	0.50	25.03	0.35	8.65	Low	Negligible	Class 2*
9.32		3.00	36400	0.91	2.08	2.99	0.40	5.42	0.34	1.85	Moderate to High	Negligible	Class 2*
27.50	09	4.00	24000	09:0	4.07	4.67	2.03	22.23	0.39	8.74	Moderate to High	Negligible	Class 1
9.00		3.50	<1000	00.0	0.30	0.30	2.70	8.70	0:36	3.14	Moderate	Negligible	Class 2*
10.00	90	4.00	C92C (67%) <sup>2</sup> 1332 185.00 10.00 4.00 6600 0.17	0.17	0.35	0.52	4.70	9.31	0.41	3.82	Moderate to high	Negligible	Class 2*

\*Surface water – Groundwater Interaction (Based on potential Stream Flow Reduction Factor): Moderate = <10% to 5%, Low = <5% to 1%, and Negligible = <1%.

\*Exploitation Factor = That part of the recharge that can be abstracted over time from an aquifer system due to the hydraulic nature of the water bearing formation.

\*Only the upper parts (indicated as percentages of the total quaternary catchment area) falls in the Lower Vaal catchment area.

\*In terms of Water Research Commission: Quality of Domestic Water Supplies – Volume 1. Report No. TT 101/98, Second Edition, 1998.

Grey shading: Dolomite water areas (Significant aquifer systems) - At least 25% of quaternary catchment contains dolomite rocks.

"GRDM Classification System:	ation System:
0.20 - 0.40	Moderate
0.40 - 0.65	Moderate to High
0.65 - 0.95	High
> 0.95	Critical

## PROPOSED GROUNDWATER RESERVE - WATER QUALITY COMPONENT

The groundwater quality of quaternary catchments with available hydrochemistry data was assessed against the domestic water target water quality ranges as shown in Table 6.2 and Table 6.3. A summary of the results for the groundwater quality classification at quaternary level in terms of the basic human needs requirement is included in the tables that follow (Tables 6.4 – 6.73).

Table 6.2: Chemical water quality

Chemical Parameter	Water Quali	ity Ranges <sup>1</sup>			
Chemical Parameter	Units	Class 0	Class I	Class II	Class III
Calcium as Ca	mg/l	0 - 80	80 - 150	150 - 300	> 300
Magnesium as Mg	mg/l	0 - 30	30 - 70	70 - 100	> 100
Potassium as K	mg/l	0 - 25	25 - 50	50 - 100	> 100
Sodium as Na	mg/l	0 - 100	100 - 200	200 - 400	> 400
Chloride as Cl	mg/l	0 - 100	100 - 200	200 - 600	> 600
Sulphate as SO <sub>4</sub>	mg/l	0 - 200	200 - 400	400 - 600	> 600
Nitrate as NO <sub>x-</sub> N	mg/l	0 - 6	6 - 10	10 - 20	> 20
Fluoride as F	mg/l	< 0.7	0.7 - 1.0	1.0 - 1.5	> 1.5
Total hardness as CaCO₃	mg/l	0 - 200	200 - 300	300 - 600	> 600

Reference: Classification System in terms of - Water Research Commission: Quality of Domestic Water Supplies - Volume 1, Report No. TT 101/98, Second Edition, 1998.

Table 6.3: Physical water quality

Dhysical Davenneton	Water Qual	ity Ranges <sup>2</sup>			
Physical Parameter	Units	Class 0	Class I	Class II	Class III
pH (pH Units)		6 - 9	5 - 6 & 9 - 9.5	4.5 - 5 & 9.5 - 10	< 4 or > 10
Total Dissolved Solids	mg/l	0 - 450	450 - 1000	1000 - 2400	> 2400
Electrical Conductivity	mS/m	0 - 70	70 - 150	150 - 370	> 370

Reference: Classification System in terms of - Water Research Commission: Quality of Domestic Water Supplies - Volume 1. Report No. TT 101/98, Second Edition, 1998.

The water quality for the following quaternary catchments were not assessed due to insufficient information (lack of representable groundwater quality data):

- C11A; C11B; C11C; C11D; C11E; C11F; C11G; C11J; C11K; C11L; C11M
- C12A; C12B; C12C; C12E; C12F; C12G; C12H; C12J; C12K; C12L
- C13A; C13B; C13C; C13D; C13E; C13F; C13G
- C21A; C21B
- C22G
- C23A; C23C
- C25D
- C41B; C41C; C41E; C41F; C41G; C41H; C41J
- C42A; C42B; C42C; C42D; C42E; C42F; C42G; C42H; C42J; C42K; C42L
- C43C; C43D
- C60A; C60B; C60C; C60D; C60F; C60G; C60H; C60J
- C70A;C70B; C70C; C70E; C70F; C70G; C70H; C70J; C70K
- C81A; C81B; C81C; C81D; C81E; C81G; C81H; C81J; C81K; C81L; C81M
- C82A; C82C; C82D; C82E; C82F; C82G
- C83A; C83C; C83D; C83E; C83F; C83G; C83H; C83JC83K; C83L; C83M

Table 6.4: Groundwater Quality Reserve - Quaternary catchment C11H

			Vaal WMA – 0	Quaternary catchmen *C11H	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		37	8.20	9.5 - 5.0 (±0.05)	9.0
Electrical Conductivity	mS/m	37	79.70	<150	88
Calcium as Ca	mg/l	37	78.65	<150	87
Magnesium as Mg	mg/l	37	36.28	<70	39
Sodium as Na	mg/l	37	48.76	<200	54
Potassium as K	mg/l	37	4.24	<50	4.7
Total Hardness as CaCO <sub>3</sub>	mg/l	37	345.8	<300	380
Chloride as Cl	mg/l	37	32.32	<200	36
Sulphate as SO <sub>4</sub>	mg/l	37	61.58	<400	68
Nitrate as NO <sub>x</sub> -N	mg/l	37	4.75	<10	5.2
Fluoride as F	mg/l	37	0.35	<1.0	0.39
			*	Water Quality Class	Class 2

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.5: Groundwater Quality Reserve – Quaternary catchment C12D

			Vaal WMA – (	Quaternary catchmen *C12D	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		34	8.13	9.5 – 5.0 (±0.05)	9.0
Electrical Conductivity	mS/m	34	89.25	<150	98
Calcium as Ca	mg/l	34	84.75	<150	93
Magnesium as Mg	mg/l	34	48.91	<70	54
Sodium as Na	mg/l	34	29.33	<200	32
Potassium as K	mg/l	34	8.34	<50	9
Total Hardness as CaCO <sub>3</sub>	mg/l	34	413	<300	454
Chloride as Cl	mg/l	34	44.61	<200	49
Sulphate as SO <sub>4</sub>	mg/l	34	96.36	<400	106
Nitrate as NO <sub>x</sub> -N	mg/l	34	3.63	<10	4
Fluoride as F	mg/l	34	0.28	<1.0	0.3
			*	Water Quality Class	Class 2

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used

Table 6.6: Groundwater Quality Reserve - Quaternary catchment C21C

			Vaal WMA – 0	Quaternary catchmen C21C	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		67	7.65	9.5 - 5.0 (±0.05)	8.4
Electrical Conductivity	mS/m	67	57.20	<150	63
Calcium as Ca	mg/l	67	40.10	<150	44
Magnesium as Mg	mg/l	67	19.40	<70	21
Sodium as Na	mg/l	67	39.10	<200	43
Potassium as K	mg/l	67	4.98	<50	5
Total Hardness as CaCO <sub>3</sub>	mg/l	67	180	<300	198
Chloride as Cl	mg/l	67	43.40	<200	48
Sulphate as SO <sub>4</sub>	mg/l	67	31.60	<400	35
Nitrate as NO <sub>x</sub> -N	mg/l	67	0.10	<10	0.11
Fluoride as F	mg/l	67	0.71	<1.0	0.78
	4			Water Quality Class	Class 0

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.7: Groundwater Quality Reserve - Quaternary catchment C21D

			Vaal WMA – C	Quaternary catchmen C21D*	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		17	7.37	9.5 - 5.0 (±0.05)	8.1
Electrical Conductivity	mS/m	17	27.50	<150	30
Calcium as Ca	mg/l	17	19.10	<150	21
Magnesium as Mg	mg/l	17	11	<70	12
Sodium as Na	mg/l	17	13.40	<200	15
Potassium as K	mg/l	17	2.20	<50	2.4
Total Hardness as CaCO <sub>3</sub>	mg/l	17	101.60	<300	112
Chloride as Cl	mg/l	17	8.50	<200	9
Sulphate as SO <sub>4</sub>	mg/l	17	6.10	<400	7
Nitrate as NO <sub>x</sub> -N	mg/l	17	0.23	<10	0.25
Fluoride as F	mg/l	17	0.12	<1.0	0.13
		**	4	Water Quality Class	Class 0

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and

<sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.8: Groundwater Quality Reserve - Quaternary catchment C21E

			Vaal WMA – 0	Quaternary catchmen C21E*	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		11	7.52	9.5 - 5.0 (±0.05)	8.3
Electrical Conductivity	mS/m	11	51.90	<150	57
Calcium as Ca	mg/l	11	39.70	<150	44
Magnesium as Mg	mg/l	11	20.90	<70	23
Sodium as Na	mg/l	11	26.00	<200	29
Potassium as K	mg/l	11	10.43	<50	11
Total Hardness as CaCO <sub>3</sub>	mg/l	11	185.2	<300	203
Chloride as Cl	mg/l	11	29.50	<200	32
Sulphate as SO <sub>4</sub>	mg/l	11	32.30	<400	36
Nitrate as NO <sub>x</sub> -N	mg/l	11	1.73	<10	1.9
Fluoride as F	mg/l	11	0.17	<1.0	0.19
			·	Water Quality Class	Class 1

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.9: Groundwater Quality Reserve – Quaternary catchment C21F

			Vaal WMA – 0	Quaternary catchmen *C21F	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
pН		31	7.92	9.5 - 5.0 (±0.05)	8.7
Electrical Conductivity	mS/m	31	41.80	<150	46
Calcium as Ca	mg/l	31	39.34	<150	43
Magnesium as Mg	mg/l	31	19.71	<70	22
Sodium as Na	mg/l	31	10.72	<200	12
Potassium as K	mg/l	31	0.50	<50	1
Total Hardness as CaCO <sub>3</sub>	mg/l	31	179.5	<300	198
Chloride as Cl	mg/l	31	25.60	<200	28
Sulphate as SO <sub>4</sub>	mg/l	31	12.87	<400	14
Nitrate as NO <sub>x</sub> -N	mg/l	31	2.88	<10	3.21
Fluoride as F	mg/l	31	0.13	<1.0	0.15
		A-		Water Quality Class	Class 0

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used

Table 6.10: Groundwater Quality Reserve - Quaternary catchment C21G

			Vaal WMA – 0	Quaternary catchmen C21G*	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
pH		15	7.58	9.5 - 5.0 (±0.05)	8.3
Electrical Conductivity	mS/m	15	48.30	<150	53
Calcium as Ca	mg/l	15	32	<150	35
Magnesium as Mg	mg/l	15	20.80	<70	23
Sodium as Na	mg/l	15	23.80	<200	26
Potassium as K	mg/l	15	3.23	<50	4
Total Hardness as CaCO <sub>3</sub>	mg/l	15	165.6	<300	182
Chloride as Cl	mg/l	15	12.409	<200	14
Sulphate as SO <sub>4</sub>	mg/l	15	12.40	<400	14
Nitrate as NO <sub>x</sub> -N	mg/l	15	1.52	<10	2
Fluoride as F	mg/l	15	0.21	<1.0	0.23
	-			Water Quality Class	Class 0

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.11: Groundwater Quality Reserve - Quaternary catchment C22A

			t:		
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples (	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		45	8.00	9.5 - 5.0 (±0.05)	8.1
Electrical Conductivity	mS/m	45	46.5	<150	51
Calcium as Ca	mg/l	45	38.6	<150	43
Magnesium as Mg	mg/l	45	29.0	<70	32
Sodium as Na	mg/l	45	8.00	<200	8.8
Potassium as K	mg/l	45	0.96	<50	1.1
Total Hardness as CaCO <sub>3</sub>	mg/l	45	215.8	<300	237
Chloride as CI	mg/l	45	5.8	<200	6.4
Sulphate as SO <sub>4</sub>	mg/l	45	90.0	<400	99
Nitrate as NO <sub>x</sub> -N	mg/l	45	4.07	<10	4.5
Fluoride as F	mg/l	45	0.10	<1.0	0.11
				Water Quality Class	Class 1

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and
 Median value plus 10%.

Table 6.12: Groundwater Quality Reserve - Quaternary catchment C22B

		Vaal WMA – Quaternary catchment: C22B*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		53	7.70	9.5 - 5.0 (±0.05)	8.5	
Electrical Conductivity	mS/m	53	134.10	<150	148	
Calcium as Ca	mg/l	53	106.45	<150	117	
Magnesium as Mg	mg/l	53	58.70	<70	65	
Sodium as Na	mg/l	53	46.25	<200	51	
Potassium as K	mg/l	53	3.75	<50	4	
Total Hardness as CaCO <sub>3</sub>	mg/i	53	507.5	<300	558	
Chloride as CI	mg/l	53	55.10	<200	61	
Sulphate as SO <sub>4</sub>	mg/l	53	308.70	<400	340	
Nitrate as NO <sub>x</sub> -N	mg/l	53	2.40	<10	2.6	
Fluoride as F	mg/l	53	0.15	<1.0	0.17	
		^		Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.13: Groundwater Quality Reserve - Quaternary catchment C22C

		Vaal WMA – Quaternary catchment: C22C				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		123	7.79	9.5 - 5.0 (±0.05)	8.6	
Electrical Conductivity	mS/m	123	57	<150	63	
Calcium as Ca	mg/l	123	44.0	<150	50	
Magnesium as Mg	mg/l	123	32.0	<70	35	
Sodium as Na	mg/l	123	14.8	<200	16	
Pota <b>ss</b> ium as K	mg/l	123	1.84	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	123	241.6	<300	266	
Chloride as Cl	mg/l	123	16.8	<200	19	
Sulphate as SO <sub>4</sub>	mg/l	123	23.2	<400	26	
Nitrate as NO <sub>x</sub> -N	mg/l	123	2.38	<10	2.6	
Fluoride as F	mg/l	123	0.10	<1.0	0.11	
				Water Quality Class	Class 1	

Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

3 Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

Table 6.14: Groundwater Quality Reserve - Quaternary catchment C22D

		Vaal WMA – Quaternary catchment: C22D*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		182	7.60	9.5 - 5.0 (±0.05)	8.4	
Electrical Conductivity	mS/m	182	38.15	<150	42	
Calcium as Ca	mg/l	182	35.90	<150	39	
Magnesium as Mg	mg/l	182	22.85	<70	25	
Sodium as Na	mg/l	182	6.30	<200	7	
Potassium as K	mg/l	182	0.84	<50	1	
Total Hardness as CaCO <sub>3</sub>	mg/l	182	183.7	<300	202	
Chloride as Cl	mg/l	182	6.25	<200	7	
Sulphate as SO <sub>4</sub>	mg/l	182	9	<400	10	
Nitrate as NO <sub>x</sub> -N	mg/l	182	1.20	<10	1.3	
Fluoride as F	mg/l	182	0.10	<1.0	0.11	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.15: Groundwater Quality Reserve – Quaternary catchment C22E

		Vaal WMA – Quaternary catchment: C22E*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples				
рН		181	7.68	9.5 - 5.0 (±0.05)	8.5	
Electrical Conductivity	mS/m	181	38.70	<150	43	
Calcium as Ca	mg/l	181	33.80	<150	37	
Magnesium as Mg	mg/l	181	22.90	<70	25	
Sodium as Na	mg/l	181	10.10	<200	11	
Potassium as K	mg/l	181	0.94	<50	1	
Total Hardness as CaCO <sub>3</sub>	mg/l	181	178.70	<300	197	
Chloride as Cl	mg/l	181	7.10	<200	8	
Sulphate as SO <sub>4</sub>	mg/l	181	9.70	<400	11	
Nitrate as NO <sub>x</sub> -N	mg/l	181	1.05	<10	1.2	
Fluoride as F	mg/l	181	0.13	<1.0	0.14	
,				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

Table 6.16: Groundwater Quality Reserve - Quaternary catchment C22F

		Vaal WMA – Quaternary catchment: C22F*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		39	7.60	9.5 - 5.0 (±0.05)	8.4	
Electrical Conductivity	mS/m	39	48.30	<150	53	
Calcium as Ca	mg/l	39	42.70	<150	47	
Magnesium as Mg	mg/l	39	22.30	<70	25	
Sodium as Na	mg/l	39	18	<200	20	
Potassium as K	mg/l	39	1.61	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	39	198.5	<300	218	
Chloride as Cl	mg/l	39	14.40	<200	16	
Sulphate as SO <sub>4</sub>	mg/l	39	10.30	<400	11	
Nitrate as NO <sub>x</sub> -N	mg/l	39	0.50	<10	0.55	
Fluoride as F	mg/l	39	0.20	<1.0	0.22	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

2 Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

Table 6.17: The results of the Groundwater Component - QC C22H

		Vaal WMA – Quaternary catchment: C22H*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		30	7.21	9.5 - 5.0 (±0.05)	7.9	
Electrical Conductivity	mS/m	30	18.30	<150	20	
Calcium as Ca	mg/l	30	14.50	<150	16	
Magnesium as Mg	mg/l	30	6	<70	7	
Sodium as Na	mg/l	30	7.05	<200	8	
Potassium as K	mg/l	30	0.91	<50	1	
Total Hardness as CaCO <sub>3</sub>	mg/l	30	60.9	<300	67	
Chloride as CI	mg/l	30	4.45	<200	5	
Sulphate as SO <sub>4</sub>	mg/l	30	4.70	<400	5	
Nitrate as NO <sub>x</sub> -N	mg/l	30	0.11	<10	0.12	
Fluoride as F	mg/l	30	0.14	<1.0	0.15	
				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

Table 6.18: Groundwater Quality Reserve – Quaternary catchment C22J

			t:		
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		30	7.40	9.5 - 5.0 (±0.05)	8.1
Electrical Conductivity	mS/m	30	56.10	<150	62
Calcium as Ca	mg/l	30	47.70	<150	52
Magnesium as Mg	mg/l	30	27.65	<70	30
Sodium as Na	mg/l	30	23.75	<200	26
Potassium as K	mg/l	30	1.17	<50	1.3
Total Hardness as CaCO <sub>3</sub>	mg/l	30	233.0	<300	256
Chloride as Cl	mg/l	30	17.35	<200	19
Sulphate as SO <sub>4</sub>	mg/l	30	21.85	<400	24
Nitrate as NO <sub>x</sub> -N	mg/l	30	4.29	<10	5
Fluoride as F	mg/l	30	0.21	<1.0	0.23
	"			Water Quality Class	Class 1

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.19: Groundwater Quality Reserve – Quaternary catchment C22K

			t:		
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of GW quality BHN Limit <sup>2</sup> (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		9	7.71	9.5 - 5.0 (±0.05)	8.5
Electrical Conductivity	mS/m	9	50.60	<150	56
Calcium as Ca	mg/l	9	40.20	<150	44
Magnesium as Mg	mg/l	9	13	<70	14
Sodium as Na	mg/l	9	33.60	<200	37
Potassium as K	mg/l	9	2.73	<50	3
Total Hardness as CaCO <sub>3</sub>	mg/l	9	153.9	<300	169
Chloride as Cl	mg/l	9	17.80	<200	20
Sulphate as SO <sub>4</sub>	mg/l	9	3.10	<400	3.4
Nitrate as NO <sub>x</sub> -N	mg/l	9	0.20	<10	0.22
Fluoride as F	mg/l	9	0.28	<1.0	0.31
				Water Quality Class	Class 0

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

Table 6.20: Groundwater Quality Reserve - Quaternary catchment C23B

		Vaal WMA – Quaternary catchment: C23B*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		16	7.64	9.5 - 5.0 (±0.05)	8.4	
Electrical Conductivity	mS/m	16	43.10	<150	47	
Calcium as Ca	mg/l	16	31.05	<150	34	
Magnesium as Mg	mg/l	16	20.45	<70	23	
Sodium as Na	mg/l	16	15.95	<200	18	
Potassium as K	mg/l	16	2.37	<50	3	
Total Hardness as CaCO <sub>3</sub>	mg/l	16	161.7	>300	178	
Chloride as Cl	mg/l	16	13.30	<200	15	
Sulphate as SO <sub>4</sub>	mg/l	16	10.25	<400	11	
Nitrate as NO <sub>x</sub> -N	mg/l	16	2.44	<10	3	
Fluoride as F	mg/l	16	0.23	<1.0	0.25	
				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.21: Groundwater Quality Reserve – Quaternary catchment C23C

		Vaal WMA – Quaternary catchment: *C23C				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		35	7.92	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	35	64.80	<150	71	
Calcium as Ca	mg/l	35	42.45	<150	47	
Magnesium as Mg	mg/l	35	27.76	<70	31	
Sodium as Na	mg/l	35	53.10	<200	58	
Potassiu <b>m</b> as K	mg/l	35	4.61	<50	5	
Total Hardness as CaCO <sub>3</sub>	mg/l	35	220.3	<300	242	
Chloride as Cl	mg/l	35	24.50	<200	26	
Sulphate as SO <sub>4</sub>	mg/l	35	19.40	<400	21	
Nitrate as NO <sub>x</sub> -N	mg/l	35	4.07	<10	5	
Fluoride as F	mg/l	35	0.42	<1.0	0.46	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used.

Table 6.22: The results of the Groundwater Component - QC C23D

		Vaal WMA – Quaternary catchment: C23D⁴				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
pH		74	7.08	9.5 - 5.0 (±0.05)	7.8	
Electrical Conductivity	mS/m	74	20.40	<150	22	
Calcium as Ca	mg/l	74	16	<150	18	
Magnesium as Mg	mg/l	74	10.70	<70	12	
Sodium as Na	mg/l	74	3.80	<200	4	
Potassium as K	mg/l	74	0.78	<50	1	
Total Hardness as CaCO <sub>3</sub>	mg/l	74	84.0	<300	92	
Chloride as Cl	mg/l	74	2.25	<200	2.5	
Sulphate as SO <sub>4</sub>	mg/l	74	12.90	<400	14	
Nitrate as NO <sub>x</sub> -N	mg/l	74	0.53	<10	1	
Fluoride as F	mg/l	74	0.05	<1.0	0.06	
				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.23: Groundwater Quality Reserve - Quaternary catchment C23E

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23E⁺				
		No. of Samples	[B]  GW quality (median value) <sup>1</sup>	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>	
						pH
Electrical Conductivity	mS/m	34	50.4	<150	55	
Calcium as Ca	mg/l	34	51.1	<150	56	
Magnesium as Mg	mg/l	34	33.7	<70	37	
Sodium as Na	mg/l	34	9.9	<200	11	
Potassium as K	mg/l	34	1.29	<50	1.4	
Total Hardness as CaCO <sub>3</sub>	mg/l	34	266.4	<300	293	
Chloride as Cl	mg/l	34	5.15	<200	6	
Sulphate as SO <sub>4</sub>	mg/l	34	24.6	<400	27	
Nitrate as NO <sub>x</sub> -N	mg/l	34	1.96	<10	2	
Fluoride as F	mg/l	34	0.05	<1.0	0.06	
	-	**		Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

Table 6.24: Groundwater Quality Reserve - Quaternary catchment C23F

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23F*				
		[A] No. of Samples	[B]  GW quality (median value) <sup>1</sup>	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>	
						рН
Electrical Conductivity	mS/m	14	31.20	<150	34	
Calcium as Ca	mg/l	14	30.90	<150	34	
Magnesium as Mg	mg/l	14	16.75	<70	18	
Sodium as Na	mg/l	14	3.40	<200	4	
Potassium as K	mg/l	14	0.90	<50	1	
Total Hardness as CaCO <sub>3</sub>	mg/l	14	146.1	<300	161	
Chloride as Cl	mg/l	14	3.35	<200	3.7	
Sulphate as SO <sub>4</sub>	mg/l	14	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	14	1	<10	1.1	
Fluoride as F	mg/l	14	0.12	<1.0	0.13	
		•		Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.25: Groundwater Quality Reserve - Quaternary catchment C23G

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23G*				
		No. of Samples	[B]  GW quality (median value) <sup>1</sup>	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>	
						pH
Electrical Conductivity	mS/m	196	88.95	<150	98	
Calcium as Ca	mg/l	196	79.95	<150	88	
Magnesium as Mg	mg/l	196	44.55	<70	49	
Sodium as Na	mg/l	196	44.35	<200	48	
Potassium as K	mg/l	196	1.88	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	196	383.1	<300	421	
Chloride as Cl	mg/l	196	45.40	<200	50	
Sulphate as SO <sub>4</sub>	mg/l	196	228.05	<400	251	
Nitrate as NO <sub>x</sub> -N	mg/l	196	2.11	<10	2.3	
Fluoride as F	mg/l	196	0.11	<1.0	0.12	
		,	·	Water Quality Class	Class 2	

Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on long-term hydrochemistry dataset from only one monitoring (spring/eye) site in the quaternary catchment

Table 6.26: Groundwater Quality Reserve - Quaternary catchment C23H

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23H				
		[A] No. of Samples	[B]  GW quality (median value) <sup>1</sup>	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>	
						рН
Electrical Conductivity	mS/m	19	43.70	<150	48	
Calcium as Ca	mg/l	19	44	<150	48	
Magnesium as Mg	mg/l	19	24.60	<70	27	
Sodium as Na	mg/l	19	11.40	<200	13	
Potassium as K	mg/l	19	1.14	<50	1.25	
Total Hardness as CaCO <sub>3</sub>	mg/l	19	211.3	<300	232	
Chloride as Cl	mg/l	19	7.20	<200	8	
Sulphate as SO <sub>4</sub>	mg/l	19	5.20	<400	6	
Nitrate as NO <sub>x</sub> -N	mg/l	19	3.11	<10	3.4	
Fluoride as F	mg/l	19	0.13	<1.0	0.14	
		-	· · · · · · · · · · · · · · · · · · ·	Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.27: Groundwater Quality Reserve - Quaternary catchment C23J

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23J*					
		[A] No. of Samples	[B]  GW quality (median value)¹	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>		
						рН	
Electrical Conductivity	mS/m	20	44.2	<150	49		
Calcium as Ca	mg/l	20	28.3	<150	31		
Magnesium as Mg	mg/l	20	31.0	<70	34		
Sodium as Na	mg/l	20	14.3	<200	16		
Potassium as K	mg/l	20	1.50	<50	1.65		
Total Hardness as CaCO₃	mg/l	20	198.3	<300	218		
Chloride as Cl	mg/l	20	8.40	<200	9.0		
Sulphate as SO <sub>4</sub>	mg/l	20	7.45	<400	8.20		
Nitrate as NO <sub>x</sub> -N	mg/l	20	0.79	<10	0.87		
Fluoride as F	mg/l	20	0.22	<1.0	0.24		
			·	Water Quality Class	Class 1		

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and <sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.28: Groundwater Quality Reserve – Quaternary catchment C23K

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23K*					
		[A] No. of Samples	[B]  GW quality (median value) <sup>1</sup>	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>		
						рН	
Electrical Conductivity	mS/m	9	39.50	<150	43		
Calcium as Ca	mg/l	9	44.50	<150	49		
Magnesium as Mg	mg/l	9	19.20	<70	21		
Sodium as Na	mg/l	9	15.70	<200	17		
Potassium as K	mg/l	9	1.07	<50	1.1		
Total Hardness as CaCO₃	mg/l	9	190.2	<300	209		
Chloride as Cl	mg/l	9	6.10	<200	7		
Sulphate as SO <sub>4</sub>	mg/l	9	4	<400	4.5		
Nitrate as NO <sub>x</sub> -N	mg/l	9	2.32	<10	3		
Fluoride as F	mg/l	9	0.18	<1.0	0.2		
	łu.	1	· · · · · · · · · · · · · · · · · · ·	Water Quality Class	Class 1		

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.29: Groundwater Quality Reserve - Quaternary catchment C23L

Chemical Parameter	Unit	Vaal WMA – Quaternary catchment: C23L⁴				
		[A] No. of Samples	[B]  GW quality (median value) <sup>1</sup>	[C] BHN Limit <sup>2</sup>	[D] Groundwater Quality Reserve <sup>3</sup>	
						рН
Electrical Conductivity	mS/m	26	34.70	<150	38	
Calcium as Ca	mg/l	26	33.55	<150	37	
Magnesium as Mg	mg/l	26	16.80	<70	18	
Sodium as Na	mg/l	26	10.25	<200	11	
Potassium as K	mg/l	26	1.47	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	26	153	<300	168	
Chloride as Cl	mg/l	26	5.90	<200	6	
Sulphate as SO <sub>4</sub>	mg/l	26	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	26	0.87	<10	1	
Fluoride as F	mg/l	26	0.13	<1.0	0.14	
			***************************************	Water Quality Class	Class 0	

Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2nd Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.30 Groundwater Quality Reserve - Quaternary catchment C24A

	11.	Vaal WMA – Quaternary catchment: C24A				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
pН		112	7.40	9.5 - 5.0 (±0.05)	8.1	
Electrical Conductivity	mS/m	112	108.05	<150	119	
Calcium as Ca	mg/l	112	89.95	<150	99	
Magnesium as Mg	mg/l	112	74.30	<70	82	
Sodium as Na	mg/l	112	70.35	<200	77	
Potassium as K	mg/l	112	7.74	<50	9	
Total Hardness as CaCO <sub>3</sub>	mg/l	112	529.3	<300	582	
Chloride as Cl	mg/l	112	67.05	<200	74	
Sulphate as SO <sub>4</sub>	mg/l	112	323.45	<400	356	
Nitrate as NO <sub>x</sub> -N	mg/l	112	1.99	<10	2	
Fluoride as F	mg/l	112	0.16	<1.0	0.18	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.31: Groundwater Quality Reserve - Quaternary catchment C24B

		Vaal WMA – Quaternary catchment: C24B*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	C24B*  [C]  BHN Limit <sup>2</sup> 9.5 - 5.0 (±0.05)  <150  <150  <70  <200  <50  <300  <200  <400  <10	Groundwater Quality Reserve	
рН		13	7.17	9.5 - 5.0 (±0.05)	7.9	
Electrical Conductivity	mS/m	13	361.20	<150	397	
Calcium as Ca	mg/l	13	458.60	<150	504	
Magnesium as Mg	mg/l	13	225.40	<70	248	
Sodium as Na	mg/l	13	118.90	<200	131	
Potassium as K	mg/l	13	20.14	<50	22	
Fotal Hardness as CaCO₃	mg/l	13	2073.3	<300	2281	
Chloride as Cl	mg/l	13	143.40	<200	158	
Sulphate as SO <sub>4</sub>	mg/l	13	2109.90	<400	2321	
Nitrate as NO <sub>x</sub> -N	mg/l	13	4.82	<10	5.3	
Fluoride as F	mg/l	13	0.22	<1.0	0.24	
				Water Quality Class	Class 3	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset

Table 6.32: Groundwater Quality Reserve – Quaternary catchment C24C

Chemical Parameter	7/11	Vaal WMA – Quaternary catchment: C24C				
	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
pH		161	7.95	9.5 - 5.0 (±0.05)	8.8	
Electrical Conductivity	mS/m	161	40.70	<150	45	
Calcium as Ca	mg/l	161	34	<150	37	
Magnesium as Mg	mg/l	161	29.20	<70	32	
Sodium as Na	mg/l	161	4.60	<200	5	
Potassium as K	mg/l	161	1.43	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	161	205.1	<300	226	
Chloride as Cl	mg/l	161	5.70	<200	6	
Sulphate as SO <sub>4</sub>	mg/l	161	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	161	1.97	<10	2.2	
Fluoride as F	mg/l	161	0.05	<1.0	0.06	
			/·	Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.33: Groundwater Quality Reserve - Quaternary catchment C24D

		Vaal WMA – Quaternary catchment: C24D				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		10	7.70	9.5 - 5.0 (±0.05)	8.5	
Electrical Conductivity	mS/m	10	24.30	<150	27	
Calcium as Ca	mg/l	10	16.95	<150	19	
Magnesium as Mg	mg/l	10	10.10	<70	11	
Sodium as Na	mg/l	10	13.90	<200	15	
Potassium as K	mg/l	10	3.03	<50	3.3	
Total Hardness as CaCO <sub>3</sub>	mg/l	10	83.9	<300	92	
Chloride as Cl	mg/l	10	5.05	<200	6	
Sulphate as SO <sub>4</sub>	mg/l	10	7.05	<400	8	
Nitrate as NO <sub>x</sub> -N	mg/l	10	3.46	<10	3.8	
Fluoride as F	mg/l	10	0.13	<1.0	0.15	
		-	-	Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and <sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and <sup>3</sup> Median value plus 10%.

Table 6.34: Groundwater Quality Reserve – Quaternary catchment C24E

		Vaal WMA – Quaternary catchment: C24E				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples		BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		48	7.89	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	48	48.80	<150	54	
Calcium as Ca	mg/l	48	35.45	<150	39	
Magnesium as Mg	mg/l	48	35.75	<70	39	
Sodium as Na	mg/l	48	7.20	<200	8	
Potassium as K	mg/l	48	1.37	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	48	235.7	<300	259	
Chloride as Cl	mg/l	48	12.15	<200	13	
Sulphate as SO <sub>4</sub>	mg/l	48	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	48	5.21	<10	6	
Fluoride as F	mg/l	48	0.13	<1.0	0.14	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>3</sup> Median value plus 10%.

Table 6.35: Groundwater Quality Reserve - Quaternary catchment C24F

		Vaal WMA – Quaternary catchment: C24F				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	C24F   [C]   BHN Limit <sup>2</sup>   9.5 - 5.0 (±0.05)   <150   <150   <70   <200   <50   <300   <200   <400   <10	Groundwater Quality Reserve <sup>3</sup>	
рН		175	7.84	9.5 - 5.0 (±0.05)	8.6	
Electrical Conductivity	mS/m	175	46.30		51	
Calcium as Ca	mg/l	175	40	<150	44	
Magnesium as Mg	mg/l	175	26.90	<70	30	
Sodium as Na	mg/l	175	7.70	<200	8	
Potassium as K	mg/l	175	1.80	<50	2	
Total Hardness as CaCO₃	mg/l	175	211	<300	232	
Chloride as Cl	mg/l	175	30.50	<200	34	
Sulphate as SO <sub>4</sub>	mg/i	175	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	175	6.62	<10	7	
Fluoride as F	mg/l	175	0.05	<1.0	0.06	
			-	Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and <sup>3</sup> Median value plus 10%.

Table 6.36: Groundwater Quality Reserve - Quaternary catchment C24G

		Vaai WMA – Quaternary catchment: C24G			
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve
рН		23	7.80	9.5 – 5.0 (±0.05)	8.6
Electrical Conductivity	mS/m	23	38	<150	42
Calcium as Ca	mg/l	23	33.70	<150	37
Magnesium as Mg	mg/l	23	15.70	<70	17
Sodium as Na	mg/l	23	14.70	<200	16
Potassium as K	mg/l	23	1.99	<50	2.2
Total Hardness as CaCO <sub>3</sub>	mg/l	23	148.8	<300	164
Chloride as CI	mg/l	23	7.60	<200	8.4
Sulphate as SO <sub>4</sub>	mg/l	23	11.80	<400	13
Nitrate as NO <sub>x</sub> -N	mg/l	23	3.21	<10	3.5
Fluoride as F	mg/l	23	0.31	<1.0	0.34
				Water Quality Class	Class 0

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

Table 6.37: Groundwater Quality Reserve - Quaternary catchment C24H

		Vaal WMA – Quaternary catchment: C24H⁺				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	C24H*	Groundwater Quality Reserve <sup>3</sup>	
рН		42	7.80	9.5 - 5.0 (±0.05)	8.6	
Electrical Conductivity	mS/m	42	51.40	<150	57	
Calcium as Ca	mg/l	42	46.10	<150	51	
Magnesium as Mg	mg/l	42	25.80	<70	28	
Sodium as Na	mg/l	42	14.85	<200	16	
Potassium as K	mg/l	42	1.59	<50	1.75	
otal Hardness as CaCO₃	mg/l	42	221.4	<300	244	
Chloride as Cl	mg/l	42	15.40	<200	17	
Sulphate as SO <sub>4</sub>	mg/l	42	11.55	<400	13	
Nitrate as NO <sub>x</sub> -N	mg/l	42	3.67	<10	4.0	
Fluoride as F	mg/l	42	0.27	<1.0	0.29	
			·	Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and <sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.38: Groundwater Quality Reserve - Quaternary catchment C24J

		en en vi	Vaal WMA – 0	aal WMA – Quaternary catchment: C24J		
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		22	7.64	9.5 - 5.0 (±0.05)	8.4	
Electrical Conductivity	mS/m	22	42.60	<150	43	
Calcium as Ca	mg/l	22	36.30	<150	37	
Magnesium as Mg	mg/l	22	16.30	<70	17	
Sodium as Na	mg/l	22	24.85	<200	26	
Potassium as K	mg/l	22	1.06	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	22	157.3	<300	173.5	
Chloride as Cl	mg/l	22	10.45	<200	11	
Sulphate as SO <sub>4</sub>	mg/l	22	7.55	<400	8	
Nitrate as NO <sub>x</sub> -N	mg/l	22	1.62	<10	2	
Fluoride as F	mg/l	22	0.22	<1.0	0.24	
		•		Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.39: Groundwater Quality Reserve - Quaternary catchment C25A

		Vaal WMA – Quaternary catchment: C25A◆				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		9	7.84	9.5 - 5.0 (±0.05)	8.6	
Electrical Conductivity	mS/m	9	53.60	<150	59	
Calcium as Ca	mg/l	9	30	<150	33	
Magnesium as Mg	mg/l	9	24.90	<70	27	
Sodium as Na	mg/l	9	33.40	<200	37	
Potassium as K	mg/l	9	1.37	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	9	177.4	<300	195	
Chloride as Cl	mg/l	9	17	<200	19	
Sulphate as SO <sub>4</sub>	mg/l	9	14.20	<400	16	
Nitrate as NO <sub>x</sub> -N	mg/l	9	3.10	<10	3.4	
Fluoride as F	mg/l	9	0.82	<1.0	0.9	
				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.40: Groundwater Quality Reserve - Quaternary catchment QC C25B

Chemical Parameter		Vaai WMA – Quaternary catchment: *C25B				
	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		16	8.29	9.5 - 5.0 (±0.05)	9.1	
Electrical Conductivity	mS/m	16	136.95	<150	151	
Calcium as Ca	mg/l	16	27.32	<150	30	
Magnesium as Mg	mg/l	16	15.25	<70	17	
Sodium as Na	mg/l	16	267.18	<200	294	
Potassium as K	mg/l	16	5.03	<50	6.0	
Total Hardness as CaCO <sub>3</sub>	mg/l	16	131.0	<300	144	
Chloride as Cl	mg/l	16	117.83	<200	130	
Sulphate as SO <sub>4</sub>	mg/l	16	33.93	<400	37	
Nitrate as NO <sub>x</sub> -N	mg/l	16	0.35	<10	0.4	
Fluoride as F	mg/l	16	2.38	<1.0	2.62	
				Water Quality Class	Class 3	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>3</sup> Median value plus 10%.

Table 6.41: Groundwater Quality Reserve – Quaternary catchment C25C

		Vaal WMA – Quaternary catchment: C25C				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		28	8.13	9.5 – 5.0 (±0.05)	8.9	
Electrical Conductivity	mS/m	28	50.45	<150	56	
Calcium as Ca	mg/l	28	46.63	<150	51	
Magnesium as Mg	mg/l	28	27.52	<70	30	
Sodium as Na	mg/l	28	14.95	<200	16	
Potassium as K	mg/l	28	1.93	<50	2	
Total Hardness as CaCO <sub>3</sub>	mg/l	28	229.8	<300	253	
Chloride as Cl	mg/l	28	8.77	<200	10	
Sulphate as SO <sub>4</sub>	mg/l	28	4.32	<400	5	
Nitrate as NO <sub>x</sub> -N	mg/l	28	9.57	<10	11	
Fluoride as F	mg/l	28	0.13	<1.0	0.15	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses

<sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used.

used for the statistical evaluation is nine (9);

<sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

Table 6.42: Groundwater Quality Reserve – Quaternary catchment C25E

Chemical Parameter		Vaai WMA – Quaternary catchment: C25E				
	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		11	7.99	9.5 - 5.0 (±0.05)	8.8	
Electrical Conductivity	mS/m	11	67.70	<150	74	
Calcium as Ca	mg/l	11	48.30	<150	53	
Magnesium as Mg	mg/l	11	20.70	<70	23	
Sodium as Na	mg/l	11	19.80	<200	22	
Potassium as K	mg/l	11	2.75	<50	3	
Total Hardness as CaCO <sub>3</sub>	mg/l	11	205.8	<300	226	
Chloride as Cl	mg/l	11	17.80	<200	20	
Sulphate as SO <sub>4</sub>	mg/l	11	8.90	<400	10	
Nitrate as NO <sub>x</sub> -N	mg/l	11	13.07	<10	14	
Fluoride as F	mg/l	11	0.18	<1.0	0.2	
		•		Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.43: Groundwater Quality Reserve - Quaternary catchment C25F

		Vaal WMA – Quaternary catchment: C25F*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		22	7.75	9.5 - 5.0 (±0.05)	8.5	
Electrical Conductivity	mS/m	22	27.20	<150	30	
Calcium as Ca	mg/l	22	20.92	<150	23	
Magnesium as Mg	mg/l	22	12.30	<70	14	
Sodium as Na	mg/l	22	4.10	<200	5	
Potassium as K	mg/l	22	1	<50	1.1	
Total Hardness as CaCO <sub>3</sub>	mg/l	22	102.9	<300	113	
Chloride as Cl	mg/l	22	1.50	<200	2	
Sulphate as SO <sub>4</sub>	mg/l	22	11.45	<400	13	
Nitrate as NO <sub>x</sub> -N	mg/l	22	0.84	<10	1.0	
Fluoride as F	mg/l	22	0.05	<1.0	0.06	
			·	Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and <sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.44: Groundwater Quality Reserve – Quaternary catchment QC C31A

		Vaal WMA – Quaternary catchment: C31A				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		187	7.82	9.5 - 5.0 (±0.05)	8.6	
Electrical Conductivity	mS/m	187	60.90	<150	67	
Calcium as Ca	mg/l	187	59	<150	65	
Magnesium as Mg	mg/l	187	34.30	<70	38	
Sodium as Na	mg/l	187	13.10	<200	14	
Potassium as K	mg/l	187	2.19	<50	2.4	
Total Hardness as CaCO <sub>3</sub>	mg/l	187	288.6	<300	317	
Chloride as Cl	mg/l	187	27	<200	30	
Sulphate as SO <sub>4</sub>	mg/l	187	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	187	4.96	<10	5.5	
Fluoride as F	mg/l	187	0.12	<1.0	0.13	
		-		Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>3</sup> Median value plus 10%.

Table 6.45: Groundwater Quality Reserve – Quaternary catchment C31B

		Vaal WMA – Quaternary catchment: C31B*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D] Groundwater Quality Reserve <sup>3</sup>	
		No. of Samples	GW quality (median value) <sup>1</sup>	C31B*  [C]  BHN Limit <sup>2</sup> 9.5 – 5.0 (±0.05)  <150  <150  <70  <200  <50  <300  <200  <400  <10  <1.0		
рН		69	7.87	9.5 - 5.0 (±0.05)	8.6	
Electrical Conductivity	mS/m	69	74.80	<150	82	
Calcium as Ca	mg/l	69	80.80	<150	89	
Magnesiu <b>m</b> as Mg	mg/l	69	36.90	<70	41	
Sodium as Na	mg/l	69	23.30	<200	26	
Potassium as K	mg/l	69	3.10	<50	3.3	
Total Hardness as CaCO <sub>3</sub>	mg/l	69	353.7	<300	389	
Chloride as Cl	mg/l	69	35.70	<200	39	
Sulphate as SO <sub>4</sub>	mg/l	69	11.30	<400	12	
Nitrate as NO <sub>x</sub> -N	mg/l	69	14.05	<10	15	
Fluoride as F	mg/l	69	0.23	<1.0	0.25	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.46: Groundwater Quality Reserve – Quaternary catchment C31C

		Vaal WMA – Quaternary catchment: C31C*				
Chemical Parameter	Unit	[A] [B] [C]	[C]	[D]		
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		41	7.61	9.5 - 5.0 (±0.05)	8.4	
Electrical Conductivity	mS/m	41	42.90	<150	47	
Calcium as Ca	mg/l	41	31.90	<150	35	
Magnesium as Mg	mg/l	41	18.10	<70	20	
Sodium as Na	mg/l	41	24.80	<200	27	
Potassium as K	mg/l	41	2.73	<50	3	
Total Hardness as CaCO₃	mg/l	41	154.2	<300	169	
Chloride as Cl	mg/l	41	11.60	<200	13	
Sulphate as SO <sub>4</sub>	mg/l	41	10,10	<400	11	
Nitrate as NO <sub>x</sub> -N	mg/l	41	9.76	<10	11	
Fluoride as F	mg/l	41	0.25	<1.0	0.28	
			•	Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.47: Groundwater Quality Reserve – Quaternary catchment C31D

		Vaal WMA – Quaternary catchment: C31D*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		23	8.05	9.5 - 5.0 (±0.05)	8.9	
Electrical Conductivity	mS/m	23	83	<150	91	
Calcium as Ca	mg/l	23	83.20	<150	92	
Magnesium as Mg	mg/l	23	41.30	<70	45	
Sodium as Na	mg/l	23	49.60	<200	55	
Potassium as K	mg/l	23	4.43	<50	5	
Total Hardness as CaCO <sub>3</sub>	mg/l	23	377.8	<300	416	
Chloride as CI	mg/l	23	56.20	<200	62	
Sulphate as SO <sub>4</sub>	mg/l	23	19	<400	21	
Nitrate as NO <sub>x</sub> -N	mg/l	23	10.56	<10	12	
Fluoride as F	mg/l	23	0.42	<1.0	0.46	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.48: Groundwater Quality Reserve - Quaternary catchment C31E

		Vaal WMA – Quaternary catchment: C31E*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		82	7.88	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	82	74.85	<150	82	
Calcium as Ca	mg/l	82	70.85	<150	78	
Magnesium as Mg	mg/l	82	30.50	<70	34	
Sodium as Na	mg/l	82	44.50	<200	49	
Potassium as K	mg/l	82	3.57	<50	4	
Total Hardness as CaCO <sub>3</sub>	mg/l	82	302.5	<300	333	
Chloride as Cl	mg/l	82	42.95	<200	47	
Sulphate as SO <sub>4</sub>	mg/l	82	18.95	<400	21	
Nitrate as NO <sub>x</sub> -N	mg/l	82	14.37	<10	16	
Fluoride as F	mg/l	82	0.34	<1.0	0.37	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.49: Groundwater Quality Reserve – Quaternary catchment C31F

Chemical Parameter		Vaal WMA – Quaternary catchment: C31F*				
	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	[C]  BHN Limit <sup>2</sup> 9.5 - 5.0 (±0.05)  <150  <150  <70  <200  <50  <300  <200	Groundwater Quality Reserve <sup>3</sup>	
pH		35	7.28	9.5 - 5.0 (±0.05)	8	
Electrical Conductivity	mS/m	35	57.20		63	
Calcium as Ca	mg/l	35	43.30	<150	48	
Magnesium as Mg	mg/l	35	21.90	<70	24	
Sodium as Na	mg/l	35	43.20	<200	48	
Potassium as K	mg/l	35	2.97	<50	3.3	
Total Hardness as CaCO <sub>3</sub>	mg/l	35	198.3	<300	218	
Chloride as Cl	mg/l	35	26.90	<200	30	
Sulphate as SO <sub>4</sub>	mg/l	35	23.60	<400	26	
Nitrate as NO <sub>x</sub> -N	mg/l	35	13.28	<10	15	
Fluoride as F	mg/l	35	0.35	<1.0	0.39	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.50: Groundwater Quality Reserve - Quaternary catchment C32A

		Vaal WMA – Quaternary catchment: C32A*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	9.5 – 5.0 (±0.05) <150 <150 <70 <200	Groundwater Quality Reserve <sup>3</sup>	
рН		135	7.92	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	135	88.30		97	
Calcium as Ca	mg/l	135	69.90	<150	77	
Magnesium as Mg	mg/l	135	34.60	<70	38	
Sodium as Na	mg/i	135	71.70	<200	79	
Potassium as K	mg/l	135	3.10	<50	3.4	
Total Hardness as CaCO <sub>3</sub>	mg/i	135	316.00	<300	349	
Chloride as Cl	mg/l	135	45.20	<200	50	
Sulphate as SO <sub>4</sub>	mg/l	135	18.80	<400	21	
Nitrate as NO <sub>x</sub> -N	mg/l	135	15.87	<10	17	
Fluoride as F	mg/l	135	0.55	<1.0	0.61	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.51: Groundwater Quality Reserve - Quaternary catchment C32B

Chemical Parameter			Vaal WMA – Quaternary catchment: C32B				
	Unit	[A]	[B]	[C]	[D]		
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>		
рН		896	7.91	9.5 – 5.0 (±0.05)	8.7		
Electrical Conductivity	mS/m	896	80.95	<150	89		
Calcium as Ca	mg/l	896	56	<150	62		
Magnesium as Mg	mg/l	896	44.60	<70	49		
Sodium as Na	mg/l	896	39.70	<200	44		
Potassium as K	mg/l	896	3.18	<50	3.5		
Total Hardness as CaCO <sub>3</sub>	mg/l	896	323.5	<300	356		
Chloride as Cl	mg/l	896	43.90	<200	48		
Sulphate as SO <sub>4</sub>	mg/l	896	18.40	<400	20		
Nitrate as NO <sub>x</sub> -N	mg/l	896	7.05	<10	7.8		
Fluoride as F	mg/l	896	0.40	<1.0	0.44		
		11	*	Water Quality Class	Class 2		

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and <sup>3</sup> Median value plus 10%.

Table 6.52: Groundwater Quality Reserve – Quaternary catchment C32C

Chemical Parameter		Vaal WMA – Quaternary catchment: C32C				
	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		98	7.94	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	98	71.80	<150	79	
Calcium as Ca	mg/l	98	58	<150	64	
Magnesium as Mg	mg/l	98	43.35	<70	48	
Sodium as Na	mg/l	98	37.35	<200	41	
Potassium as K	mg/l	98	2.70	<50	3.0	
Total Hardness as CaCO <sub>3</sub>	mg/l	98	323.3	<300	356	
Chloride as Cl	mg/l	98	29.30	<200	32	
Sulphate as SO <sub>4</sub>	mg/l	98	22.70	<400	25	
Nitrate as NO <sub>x</sub> -N	mg/l	98	5.90	<10	6.5	
Fluoride as F	mg/l	98	0.40	<1.0	0.44	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>3</sup> Median value plus 10%.

Table 6.53: Groundwater Quality Reserve - Quaternary catchment C32D

		Vaal WMA – Quaternary catchment: C32D				
Chemical Parameter	Unit	Unit [A]	[B]	[C]	[D] Groundwater Quality Reserve <sup>3</sup>	
		No. of Samples	GW quality (median value) <sup>1</sup>	9.5 – 5.0 (±0.05) <150 <150 <70 <200 <50		
рН		148	8.14	9.5 – 5.0 (±0.05)	8.95	
Electrical Conductivity	mS/m	148	85.65	<150	94	
Calcium as Ca	mg/l	148	76.09	<150	84	
Magnesium as Mg	mg/l	148	64.45	<70	71	
Sodium as Na	mg/l	148	13.30	<200	15	
Potassium as K	mg/l	148	0.67	<50	0.74	
Total Hardness as CaCO <sub>3</sub>	mg/l	148	455.4	<300	501	
Chloride as Cl	mg/l	148	33.08	<200	36	
Sulphate as SO <sub>4</sub>	mg/l	148	44.35	<400	49	
Nitrate as NO <sub>x</sub> -N	mg/l	148	7.51	<10	8.3	
Fluoride as F	mg/l	148	0.29	<1.0	0.32	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

Table 6.54: Groundwater Quality Reserve - Quaternary catchment C33A

		Vaal WMA – Quaternary catchment: C33A⁺				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		264	8	9.5 - 5.0 (±0.05)	8.8	
Electrical Conductivity	mS/m	264	85.95	<150	95	
Calcium as Ca	mg/l	264	69.05	<150	76	
Magnesium as Mg	mg/l	264	69.20	<70	76	
Sodium as Na	mg/l	264	13.40	<200	15	
Potassium as K	mg/l	264	0.95	<50	1.1	
Total Hardness as CaCO <sub>3</sub>	mg/l	264	457.4	<300	503	
Chloride as Cl	mg/l	264	36	<200	40	
Sulphate as SO <sub>4</sub>	mg/l	264	31.30	<400	34	
Nitrate as NO <sub>x</sub> -N	mg/l	264	5.80	<10	6.4	
Fluoride as F	mg/l	264	0.33	<1.0	0.36	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.55: Groundwater Quality Reserve – Quaternary catchment C33B

		Vaal WMA – Quaternary catchment: C33B*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples		Groundwater Quality Reserve <sup>3</sup>		
рН		388	7.97	9.5 - 5.0 (±0.05)	8.8	
Electrical Conductivity	mS/m	388	80.15	<150	88	
Calcium as Ca	mg/l	388	59.60	<150	66	
Magnesium as Mg	mg/l	388	62.45	<70	69	
Sodium as Na	mg/l	388	14.40	<200	16	
Potassium as K	mg/l	388	1.21	<50	1.3	
Total Hardness as CaCO <sub>3</sub>	mg/l	388	406.0	<300	447	
Chloride as Cl	mg/l	388	31.40	<200	35	
Sulphate as SO <sub>4</sub>	mg/l	388	21.30	<400	23	
Nitrate as NO <sub>x</sub> -N	mg/l	388	5.67	<10	6.2	
Fluoride as F	mg/l	388	0.24	<1.0	0.26	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.56: Groundwater Quality Reserve - Quaternary catchment C33C

		Vaal WMA – Quaternary catchment: C33C*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		290	7.99	9.5 - 5.0 (±0.05)	8.8	
Electrical Conductivity	mS/m	290	71.80	<150	79	
Calcium as Ca	mg/l	290	65.10	<150	72	
Magnesium as Mg	mg/l	290	44.30	<70	49	
Sodium as Na	mg/l	290	13	<200	14	
Potassium as K	mg/l	290	2.07	<50	2.3	
Total Hardness as CaCO <sub>3</sub>	mg/l	290	345.0	<300	380	
Chloride as Cl	mg/l	290	30.65	<200	34	
Sulphate as SO <sub>4</sub>	mg/l	290	16.35	<400	18	
Nitrate as NO <sub>x</sub> -N	mg/l	290	3.99	<10	4.4	
Fluoride as F	mg/l	290	0.21	<1.0	0.23	
	-			Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.57: Groundwater Quality Reserve - Quaternary catchment C41A

		Vaal WMA – Quaternary catchment: C41A				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		17	7.97	9.5 - 5.0 (±0.05)	8.8	
Electrical Conductivity	mS/m	17	71.50	<150	79	
Calcium as Ca	mg/l	17	74.90	<150	82	
Magnesium as Mg	mg/l	17	29.20	<70	32	
Sodium as Na	mg/l	17	56.10	<200	62	
Potassium as K	mg/l	17	2.62	<50	2.9	
Total Hardness as CaCO <sub>3</sub>	mg/l	17	307.3	<300	338	
Chloride as CI	mg/l	17	11.80	<200	13	
Sulphate as SO <sub>4</sub>	mg/l	17	25.18	<400	28	
Nitrate as NO <sub>x</sub> -N	mg/l	17	2.51	<10	2.8	
Fluoride as F	mg/l	17	0.28	<1.0	0.31	
			*	Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

Table 6.58: Groundwater Quality Reserve – Quaternary catchment C41D

		Vaai WMA – Quaternary catchment: C41D*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		14	8.18	9.5 - 5.0 (±0.05)	9.0	
Electrical Conductivity	mS/m	14	82.35	<150	91	
Calcium as Ca	mg/l	14	65	<150	72	
Magnesium as Mg	mg/l	14	26.50	<70	29	
Sodium as Na	mg/l	14	65.15	<200	72	
Potassium as K	mg/l	14	2.30	<50	2.5	
Fotal Hardness as CaCO₃	mg/l	14	271.4	<300	299	
Chloride as Cl	mg/l	14	30.05	<200	33	
Sulphate as SO <sub>4</sub>	mg/l	14	21.40	<400	24	
Nitrate as NO <sub>x</sub> -N	mg/l	14	4.50	<10	5.0	
Fluoride as F	mg/l	14	0.40	<1.0	0.43	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.59: Groundwater Quality Reserve - Quaternary catchment C43B

		Vaal WMA – Quaternary catchment: C43B◆				
Chemical Parameter	Unit	[A]	[A] [B]	[C]	[D] Groundwater Quality Reserve <sup>3</sup>	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>		
рН		15	7.60	9.5 - 5.0 (±0.05)	8.4	
Electrical Conductivity	mS/m	15	70	<150	77	
Calcium as Ca	mg/l	15	69.30	<150	76	
Magnesium as Mg	mg/l	15	39.90	<70	44	
Sodium as Na	mg/l	15	22.70	<200	25	
Potassium as K	mg/l	15	2.32	<50	2.6	
Total Hardness as CaCO <sub>3</sub>	mg/l	15	337.4	<300	371	
Chloride as Cl	mg/l	15	25.50	<200	28	
Sulphate as SO <sub>4</sub>	mg/l	15	41.90	<400	46	
Nitrate as NO <sub>x</sub> -N	mg/l	15	0.07	<10	0.08	
Fluoride as F	mg/l	15	0.20	<1.0	0.22	
		to .		Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.60: Groundwater Quality Reserve - Quaternary catchment C60E

		Vaal WMA – Quaternary catchment: C60E				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
	S	No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
рН		12	7.90	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	12	64.30	<150	71	
Calcium as Ca	mg/l	12	43.90	<150	48	
Magnesium as Mg	mg/l	12	15.80	<70	17	
Sodium as Na	mg/l	12	42.30	<200	47	
Potassium as K	mg/l	12	1.01	<50	1.1	
Total Hardness as CaCO <sub>3</sub>	mg/l	12	174.7	<300	192	
Chloride as Cl	mg/l	12	20.50	<200	23	
Sulphate as SO <sub>4</sub>	mg/l	12	12	<400	13.2	
Nitrate as NO <sub>x</sub> -N	mg/l	12	1.91	<10	2.10	
Fluoride as F	mg/l	12	0.24	<1.0	0.26	
				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.61: Groundwater Quality Reserve - Quaternary catchment C70D

	W. P.	Vaal WMA – Quaternary catchment: * C70D				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		21	8.11	9.5 - 5.0 (±0.05)	8.9	
Electrical Conductivity	mS/m	21	77.50	<150	85	
Calcium as Ca	mg/l	21	62.72	<150	69	
Magnesium as Mg	mg/l	21	23.75	<70	26	
Sodium as Na	mg/l	21	70.50	<200	78	
Potassium as K	mg/l	21	4.93	<50	5	
Total Hardness as CaCO <sub>3</sub>	mg/l	21	254.4	<300	280	
Chloride as Cl	mg/l	21	29.17	<200	32	
Sulphate as SO <sub>4</sub>	mg/l	21	68.34	<400	75	
Nitrate as NO <sub>x</sub> -N	mg/l	21	1.76	<10	1.9	
Fluoride as F	mg/l	21	0.60	<1.0	0.66	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and <sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used.

Table 6.62: Groundwater Quality Reserve - Quaternary catchment C81F

		Vaal WMA – Quaternary catchment: C81F*				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
pН		18	7.25	9.5 - 5.0 (±0.05)	8.0	
Electrical Conductivity	mS/m	18	28.90	<150	32	
Calcium as Ca	mg/l	18	24.75	<150	27	
Magnesium as Mg	mg/l	18	6.30	<70	6.9	
Sodium as Na	mg/l	18	20	<200	22	
Potassium as K	mg/l	18	1.30	<50	1.4	
Total Hardness as CaCO₃	mg/l	18	87.7	<300	97	
Chloride as Cl	mg/l	18	1.50	<200	1.7	
Sulphate as SO <sub>4</sub>	mg/l	18	2	<400	2.2	
Nitrate as NO <sub>x</sub> -N	mg/l	18	0.31	<10	0.34	
Fluoride as F	mg/l	18	0.21	<1.0	0.23	
		'		Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.63: Groundwater Quality Reserve – Quaternary catchment C82B

		Vaal WMA – Quaternary catchment: *C82B				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
	8	No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		29	8.21	9.5 - 5.0 (±0.05)	9.0	
Electrical Conductivity	mS/m	29	39.90	<150	44	
Calcium as Ca	mg/l	29	32.23	<150	35	
Magnesium as Mg	mg/l	29	13.98	<70	15	
Sodium as Na	mg/l	29	27.60	<200	30	
Potassium as K	mg/l	29	3.39	<50	3.7	
Total Hardness as CaCO <sub>3</sub>	mg/l	29	138.0	<300	152	
Chloride as Cl	mg/l	29	25.24	<200	28	
Sulphate as SO <sub>4</sub>	mg/l	29	22.16	<400	24	
Nitrate as NO <sub>x</sub> -N	mg/l	29	0.17	<10	0.19	
Fluoride as F	mg/l	29	0.32	<1.0	0.35	
				Water Quality Class	Class 0	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Samples only from monitoring done in 1976.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used.

Table 6.64: Groundwater Quality Reserve - Quaternary catchment C82H

		Vaal WMA – Quaternary catchment: C82H				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve	
pН		18	8.07	9.5 - 5.0 (±0.05)	8.9	
Electrical Conductivity	mS/m	18	85.15	<150	94	
Calcium as Ca	mg/l	18	65.77	<150	72	
Magnesium as Mg	mg/l	18	27.34	<100	30	
Sodium as Na	mg/l	18	89.79	<200	99	
Potassium as K	mg/l	18	1.08	<50	1.2	
Total Hardness as CaCO <sub>3</sub>	mg/l	18	276.8	<300	305	
Chloride as Cl	mg/l	18	20.71	<200	23	
Sulphate as SO <sub>4</sub>	mg/l	18	22.56	<400	25	
Nitrate as NO <sub>x</sub> -N	mg/l	18	0.38	<10	0.41	
Fluoride as F	mg/l	18	0.78	<1.0	0.85	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.65: Groundwater Quality Reserve - Quaternary catchment C83B

		Vaal WMA – Quaternary catchment: *C83B				
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		33	7.98	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	33	60	<150	66	
Calcium as Ca	mg/l	33	52.12	<150	57	
Magnesium as Mg	mg/l	33	27.20	<70	30	
Sodium as Na	mg/l	33	33.50	<200	37	
Potassium as K	mg/l	33	0.85	<50	0.9	
Total Hardness as CaCO <sub>3</sub>	mg/l	33	242.82	<300	267	
Chloride as CI	mg/l	33	28.89	<200	32	
Sulphate as SO <sub>4</sub>	mg/l	33	35.06	<400	39	
Nitrate as NO <sub>x</sub> -N	mg/l	33	0.79	<10	0.9	
Fluoride as F	mg/l	33	0.29	<1.0	0.32	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and <sup>3</sup> Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Indicates that only post-1995 hydrochemical datasets for the specific quaternary catchment were used.

Table 6.66: Groundwater Quality Reserve - Quaternary catchment C91A

			Vaal WMA – Quaternary catchment: C91A*			
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		14	8.41	9.5 - 5.0 (±0.05)	9.3	
Electrical Conductivity	mS/m	14	70.10	<150	77	
Calcium as Ca	mg/l	14	27.45	<150	30	
Magnesium as Mg	mg/i	14	36.85	<70	41	
Sodium as Na	mg/l	14	59.70	<200	66	
Potassium as K	mg/l	14	4.02	<50	4.4	
Total Hardness as CaCO <sub>3</sub>	mg/l	14	220.3	<300	242	
Chloride as Cl	mg/l	14	44.40	<200	49	
Sulphate as SO <sub>4</sub>	mg/l	14	60.20	<400	66	
Nitrate as NO <sub>x</sub> -N	mg/l	14	3.05	<10	3.4	
Fluoride as F	mg/l	14	0.28	<1.0	0.30	
				Water Quality Class	Class 1	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.67: Groundwater Quality Reserve - Quaternary catchment C91B

			Vaal WMA – 0	Quaternary catchment:	
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		41	7.90	9.5 - 5.0 (±0.05)	8.7
Electrical Conductivity	mS/m	41	96.00	<150	106
Calcium as Ca	mg/l	41	50.50	<150	56
Magnesium as Mg	mg/l	41	46.40	<70	51
Sodium as Na	mg/l	41	70.40	<200	77
Potassium as K	mg/l	41	2.30	<50	2.5
Total Hardness as CaCO <sub>3</sub>	mg/l	41	317.2	<300	349
Chloride as Cl	mg/l	41	68.50	<200	75
Sulphate as SO <sub>4</sub>	mg/l	41	60.20	<400	66
Nitrate as NO <sub>x</sub> -N	mg/l	41	7.02	<10	7.7
Fluoride as F	mg/l	41	0.56	<1.0	0.62
			*	Water Quality Class	Class 2

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.68: Groundwater Quality Reserve - Quaternary catchment C91C

			Vaal WMA – 0	IA – Quaternary catchment: C91C		
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		33	8.12	9.5 - 5.0 (±0.05)	8.9	
Electrical Conductivity	mS/m	33	98.90	<150	109	
Calcium as Ca	mg/l	33	82.90	<150	91	
Magnesium as Mg	mg/l	33	62.57	<70	69	
Sodium as Na	mg/l	33	25.81	<200	28	
Potassium as K	mg/l	33	3.33	<50	3.7	
Total Hardness as CaCO₃	mg/l	33	464.7	<300	511	
Chloride as Cl	mg/l	33	92.36	<200	102	
Sulphate as SO <sub>4</sub>	mg/l	33	54.36	<400	60	
Nitrate as NO <sub>x</sub> -N	mg/l	33	14.42	<10	16	
Fluoride as F	mg/l	33	0.41	<1.0	0.45	
	I.	1		Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.69: Groundwater Quality Reserve – Quaternary catchment C91D

	7		Vaal WMA – Quaternary catchment: C91D⁴			
Chemical Parameter	Unit	[A]	[B]	[C]	[D]	
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>	
рН		15	7.90	9.5 - 5.0 (±0.05)	8.7	
Electrical Conductivity	mS/m	15	71.30	<150	78	
Calcium as Ca	mg/l	15	49.60	<150	55	
Magnesium as Mg	mg/l	15	38.80	<70	43	
Sodium as Na	mg/l	15	30.30	<200	33	
Potassium as K	mg/l	15	2.91	<50	3.2	
Total Hardness as CaCO <sub>3</sub>	mg/l	15	283.6	<300	312	
Chloride as Cl	mg/l	15	35.00	<200	39	
Sulphate as SO <sub>4</sub>	mg/l	15	36.50	<400	40	
Nitrate as NO <sub>x</sub> -N	mg/l	15	2.55	<10	2.8	
Fluoride as F	mg/l	15	0.64	<1.0	0.7	
				Water Quality Class	Class 2	

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide); and
 Median value plus 10%.

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.70: Groundwater Quality Reserve - Quaternary catchment C91E

			Vaal WMA – 0	Quaternary catchmen C91E*	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN LImit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		29	8.00	9.5 - 5.0 (±0.05)	8.8
Electrical Conductivity	mS/m	29	113.20	<150	125
Calcium as Ca	mg/l	29	78.20	<150	86
Magnesium as Mg	mg/l	29	61.10	<70	67
Sodium as Na	mg/l	29	53.90	<200	59
Potassium as K	mg/l	29	1.80	<50	2.0
Total Hardness as CaCO <sub>3</sub>	mg/l	29	446.9	<300	492
Chloride as Cl	mg/l	29	69.50	<200	76
Sulphate as SO <sub>4</sub>	mg/l	29	116.80	<400	128
Nitrate as NO <sub>x</sub> -N	mg/l	29	7.45	<10	8.2
Fluoride as F	mg/l	29	0.58	<1.0	0.64
		,	,	Water Quality Class	Class 2

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). MinImum number of analyses used for the statistical evaluation is nine (9);

Table 6.71: Groundwater Quality Reserve - Quaternary catchment C92A

			Vaal WMA – 0	Quaternary catchmen C92A*	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		298	8.09	9.5 - 5.0 (±0.05)	8.9
Electrical Conductivity	mS/m	298	49.10	<150	54
Calcium as Ca	mg/l	298	51.35	<150	56
Magnesium as Mg	mg/l	298	19.20	<70	21
Sodium as Na	mg/l	298	10.58	<200	12
Potassium as K	mg/l	298	2.29	<50	2.5
Total Hardness as CaCO <sub>3</sub>	mg/l	298	207.3	<300	228
Chloride as Cl	mg/l	298	20.35	<200	22
Sulphate as SO <sub>4</sub>	mg/l	298	20.45	<400	23
Nitrate as NO <sub>x</sub> -N	mg/l	298	2.31	<10	2.5
Fluoride as F	mg/l	298	0.17	<1.0	0.19
	***			Water Quality Class	Class 1

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

Table 6.72: Groundwater Quality Reserve - Quaternary catchment C92B

			Vaal WMA – (	- Quaternary catchment: C92B*	
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		46	8.22	9.5 - 5.0 (±0.05)	9.0
Electrical Conductivity	mS/m	46	100.20	<150	110
Calcium as Ca	mg/l	46	82.85	<150	91
Magnesium as Mg	mg/l	46	73.40	<70	81
Sodium as Na	mg/l	46	29.05	<200	32
Potassium as K	mg/l	46	3.28	<50	3.6
Total Hardness as CaCO <sub>3</sub>	mg/l	46	509.1	<300	560
Chloride as Cl	mg/l	46	55.55	<200	61
Sulphate as SO <sub>4</sub>	mg/l	46	42.25	<400	46
Nitrate as NO <sub>x</sub> -N	mg/l	46	6.14	<10	6.8
Fluoride as F	mg/l	46	0.31	<1.0	0.34
				Water Quality Class	Class 2

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

Table 6.73: Groundwater Quality Reserve - Quaternary catchment C92C

			Vaal WMA – 0	Quaternary catchmen C92C*	t:
Chemical Parameter	Unit	[A]	[B]	[C]	[D]
		No. of Samples	GW quality (median value) <sup>1</sup>	BHN Limit <sup>2</sup>	Groundwater Quality Reserve <sup>3</sup>
рН		100	8.27	9.5 - 5.0 (±0.05)	9.1
Electrical Conductivity	mS/m	100	87.60	<150	96
Calcium as Ca	mg/l	100	83.55	<150	92
Magnesium as Mg	mg/l	100	56.10	<70	62
Sodium as Na	mg/l	100	20.95	<200	23
Pota <b>s</b> sium as K	mg/l	100	4.13	<50	4.5
Total Hardness as CaCO <sub>3</sub>	mg/l	100	439.6	<300	484
Chloride as Cl	mg/l	100	50.85	<200	56
Sulphate as SO <sub>4</sub>	mg/l	100	32.30	<400	36
Nitrate as NO <sub>x</sub> -N	mg/l	100	4.29	<10	4.7
Fluoride as F	mg/l	100	0.33	<1.0	0.36
			·	Water Quality Class	Class 2

<sup>&</sup>lt;sup>1</sup> Based on long-term groundwater quality datasets (DWS Water Management System). Minimum number of analyses used for the statistical evaluation is nine (9);

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

<sup>\*</sup> Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

<sup>&</sup>lt;sup>2</sup> Upper limit of Class I water quality [Drinking] (WRC et al. 2<sup>nd</sup> Edition, 1998, Volume 1: Assessment Guide);and

<sup>&</sup>lt;sup>3</sup> Median value plus 10%.

Based on pre-1995 hydrochemistry dataset (most representative spatial dataset)

## 7. PROPOSED PROTECTION AND MONITORING MEASURES FOR PRIORITY WETLANDS

Priority wetlands in the Vaal River catchment area includes those wetlands which display an ecological sensitivity of a High or Very High. Additional priority wetlands were identified taking cognisance\_of inter\_alia\_unique features, red data species and peat wetlands. Proposed recommended ecological categories (REC) and ecological specifications for the priority wetlands in the Vaal catchment area is presented in Table 7.1. The Present Ecological State (PES), Importance and Sensitivity (IS) for the identified priority wetlands are also presented.

Table 7.1: Ecological specfifications for priority wetlands in the Vaal catchment area

IUA	Quaternary Catchment	Wetland Name	Wetland Type	PES	<u>s</u>	REC	TEC	Ecological Specifications Protection, Maintenance and Management Requirements
								Diffuse water distribution is required to optimise the water quality enhancement functions.
								The unchannelled nature of sections of the wetland must be maintained.
		2 cachambach						Maintain existing vegetation structure and composition.
NA	C11H	the Blesbokspruit (Upper Vaal)	Unchannelled Valley Bottom	O	High	B/C	O	Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of an Environmental Impact Assessment (EIA) and/or Water Use Licence (WUL) applications, and strict licensing conditions including monitoring of the systems should apply.
								Any application for development including mining likely to impact this system, besides going through the normal licensing processes, should also include as a minimum an Intermediate Level Wetland Reserve which includes flow modelling (surface and groundwater including interflow) of scenarios to establish the potential impact in terms of achieving the REC.
								Diffuse water distribution is required to optimise hydrological and biodiversity support functions.
nB	C13C	Vanger	Unchannelled	≪	Very High	<	⋖	Maintain in natural or near-natural ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the Critically Biodiversity Areas 1 and Ecological Support Areas 2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.
			valley Botton					Maintain the existing flow distribution and retention patterns in the system to maintain the existing vegetation structure and composition.
								Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply.

Ecological Specifications  Protection, Maintenance and Management Requirements	Diffuse water distribution is required to optimise hydrological and biodiversity support functions.  Implement measures to improve the state of the wetland towards a more natural ecological condition and manage per the protected area management plan objectives. Protect the wetland and its catchment for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the Critically Biodiversity Areas 1, Ecological Support Areas 1 and 2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem type and its associated biodiversity.	Improve the existing flow distribution and retention patterns in the system to restore the some of the lost ecological and hydrological functionality of the system and improve vegetation structure and composition.  Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply.	Monitor effluent originating from the upstream urban areas which are known to cause frequent sewage spill, as well as runoff from the solid waste site.  Identify and prioritise wetland rehabilitation requirements to be implemented by the already engaged Working for Wetlands programme.	Implement measures to improve or at least maintain the ecological condition of the system for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the Critically Biodiversity Areas 1 and Ecological Support Areas 2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.	Maintain the existing flow distribution and retention patterns in the system. Maintain existing vegetation structure and composition as well as low disturbance levels for continued support of threatened biodiversity.	Currently unchannelled wetlands must be maintained as unchannelled systems.  Flow inputs to the wetland must be protected through application of hydrological buffers determined via hydropedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply. Apply the precautionary principle for disturbance of unknown impact.  Any application for development that is likely to impact this system, besides going through the normal licensing processes, should also include as a minimum an Intermediate Level Wetland Reserve which includes flow modelling (surface and groundwater including interflow) of scenarios to establish the potential impact in terms of achieving the REC.
						B/K
REC						<u>α</u>
ō		Very High				Very High
PES		ш				O
Wetland Type		Floodplain			Unchannelled	Valley Bottom
Wetland Name		Seekoeivlei				Murphy's Rust
Quaternary		C13C				C81B
IUA		NB .				20

1 The system is in a PES category of E (Seriously Modified) but has a Very High IS as it is a Ramsar Site (Designated as a Wetland of International Importance in terms of the Ramsar Convention). A PES category of E is not sustainable so the TEC is recommended to be the same as the REC and is set one category higher than the PES. Rehabilitation intervention would be required to improve the PES. Achieving an improvement in the PES of this system should thus be prioritised.

Ecological Specifications Protection, Maintenance and Management Requirements	Maintain the naturally simulated water release from the Ingula Dam to ensure unaltered hydrological regime. Diffuse water distribution is required to optimise hydrological and biodiversity support functions.  Maintain the near-natural ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the CBA1 and ESA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.  Maintain the existing flow distribution and retention patterns in the system. Maintain existing vegetation structure and composition as well as low disturbance levels for continued support of threatened biodiversity.  Currently unchannelled wetlands must be maintained as unchannelled systems. No erosion gullies (no incision of channels or headcuts) can be permitted to develop within the wetland. This is an unchannelled wetland and is very sensitive to erosion and incision.  Flow releases from the Ingula dam must simulate the natural hydrological regime required to maintain the wetland in its existing state. The approved Reserve for the wetland recommends both baseflow and flood releases for the wetland in its existing state. The baseflows are required to ensure shallow inundation of the valley floor, particularly within those parts of the valley floor supporting mixed sedge marsh. This is required to only to provide potentially suitable habitat for the critically endangered White winged fluffiall, and breeding habitat for Wattled cranes, but to ensure safurate through monisting of the part in the system. This will also create favourable conditions for the functioning of the valley floor group through monisting through monisting the particularly mixed fluffiall, and breeding favourable conditions for the effect of the valley floor supporting mixed fluffiall.	sediments.  The function of these higher flows helps to achieve a level of wetland habitat maintenance (for the smaller inundation events) and to allow for some scour of the weakly developed channels (in the case of the larger, more infrequent flushing events).  Monitoring should be aimed at determining whether or not the recommended baseflow and flood releases are achieving the desired objectives for the wetland and the REC. It should also be for detecting change, especially changes related to the hydrological regime to inform future water releases.  Future potential impact of development applications must be determined as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply. Apply the precautionary principle for disturbance of unknown impact.  Monitoring of existing wetland rehabilitation structures is required to ensure the continued performance of the structures.	Floods are needed to inundate the floodplain thereby providing the wetting regime required for supporting the floodplain vegetation that are dependent on flooding for their life cycles.
TEC	B/C		ш
REC	ш		A/B
Ø	Very High		High
PES	O		ω
Wetland Type	Unchannelled Valley Bottom		Floodplain
Wetland Name	ingula (Bedford wetland complex)		Upper Wilge
Quaternary Catchment	C81A		C81A
IUA	nc4		UC1

## **CONTINUES ON PAGE 258 - PART 3**



## Government Gazette Staatskoerant

Vol. 642

21 December Desember

2018

No. 42127

Part3 of 3

N.B. The Government Printing Works will not be held responsible for the quality of "Hard Copies" or "Electronic Files" submitted for publication purposes ISSN 1682-5843

4212*1* 

AIDS HELPLINE: 0800-0123-22 Prevention is the cure

Ecological Specifications Protection, Maintenance and Management Requirements	Maintain in natural or near-natural ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the CBA and ESA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.  Maintain the existing flow distribution and retention patterns in the system to maintain the existing vegetation structure and composition.	Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply:	Floods are needed to inundate the floodplain thereby providing the wetting regime required for supporting the floodplain vegetation that are dependent on flooding for their life cycles	Maintain in natural or near-natural ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the ESA1 and ESA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.	Maintain the existing flow distribution and retention pattems in the system to maintain the existing vegetation structure and composition.  Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the evelence should analy	In order to improve the state of the wetland, the following should be considered:	<ul> <li>Management interventions to re-establish certain habitat types necessary for certain bird species;</li> <li>Improved treatment of mine water, waste water and effluent discharges at source prior to release in to the wetland areas;</li> <li>Engineering of some sections of the wetland to create oxidation zones to effect improved water quality. This will also recreate some of the open water habitats that were associated with high waterfowl numbers in the 1970s and 1980's;</li> <li>Prioritisation and protection of the few reaches where the species rich, seasonally wet grassland still occurs; and</li> <li>Monitoring to ensure that the specified water quality standards in terms of discharge are adhered to and enforced.</li> </ul>	
TEC				ш			Ω	
REC				A/B			CD	
ত				High			High	
PES				ш			۵	
Wetland Type				Floodplain			Flooded Valley Bottom (artificially supported)	
Wetland Name				Meul			Blesbokspruit <sup>22</sup>	
Quaternary Catchment				C81L			C21E	
NA M				UC1			ō	

2 The system is a Ramsar Site (Designated as a Wetland of International Importance in terms of the Ramsar Convention) and is regarded as being important from both a birdlife and hydro-functional perspective

Ecological Specifications Protection, Maintenance and Management Requirements	Furthermore these previous studies recommended further work to understand the effects of changing the flows through the system. There has been concern that introducing variability in flow to the system could result in some of the sediments undergoing chemical changes resulting in the mobilization of certain heavy metals and uranium, thereby creating health risks. More clarify on this issue would be required before any recommendation related to changing the flows through the system could be made with any confidence that it would not result in health risks.	Liaise with interested and affected parties to develop and implement a collaborative Management, Rehabilitation and Monitoring Plan for the wetland	Historically the flows in this system were much lower than present day, but due to the altered channel geometry—the incision of the channel in to the wetland—larger flows are now required to inundate the floodplain than would have been necessary under the Reference channel condition. Even so, the present day flows are much higher than the estimated ecological water requirements for the reach. The present day wet season baseflows even exceed the estimated annual flood requirement for the D REC. If the TEC is to be improved from the current D/E to a D or higher, then baseflows need to be reduced. If the flows cannot be reduced then it is very unlikely that the improved D condition of the wetland reach will be achieved.	If the flows are reduced then this would open up opportunities for some rehabilitation actions, such as small weirs that could be used to reinstate local baselevels to counteract the impacts of the incised channels. These sorts of structures in the mainstem would be able to raise the water and rewet the valley bottom and associated peat substrates.	Rehabilitation actions in the Klip River catchment should focus on:  • Attenuating urban stormwater peaks (in the smaller tributaries);  • Stabilising headcuts in the mainstem and larger tributaries; and  • Raising the watertable and rewetting the valley bottom peats of the main tributaries.	Liaise with interested and affected parties to develop and implement a collaborative Managemen;, Rehabilitation and Monitoring Plan for the wetland.	Diffuse water distribution is required to optimise the water quality enhancement functions. Therefore it is important to maintain and if possible enhance the existing flow distribution and retention patterns in the system.  Unchannelled sections of the wetland must be maintained as unchannelled and existing vegetation structure and composition should at least be retained or improved.  Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply.  The wetland should be assessed to identify potential rehabilitation measures that will improve its current state and the functions it is performing.			
TEC					۵					
REC				C/D						
S.						High				
PES					۵					
Wetland Type				Unchannelled and Channelled Valley Bottom						
Wetland Name			Klip River wetland Natalspruit					Natalspruit		
Quaternary				C22D				C22B		
IUA				5				5		

Ecological Specifications Protection, Maintenance and Management Requirements	Liaise with interested and affected parties to develop and implement a collaborative Management, Rehabilitation and Monitoring Plan for the wetland.	Maintain in natural or near-natural ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the ESA1 and ESA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.	Maintain and enhance the existing flow distribution and retention patterns in the system.	Currently unchannelled wetlands must be maintained as unchannelled systems. Maintain existing vegetation structure and composition.	Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply.	The wetland should be assessed to identify potential rehabilitation measures that will improve its current state.	Maintaining the perennial nature of the system and a diffuse water distribution pattern across the system are key features which determine it's ecological as well as functional importance.	Maintain in natural or near-natural ecological condition for the purpose of the long-term protection of important biodiversity, flow regulation function, and as an important and unique landscape feature.	Maintain good water quality normally associated with dolomitic aquifers and associated eyes/springs.	Prevent over-abstraction form the associated dolomitic aquifer.	Maintain the natural fish and macro-invertebrate diversity of the system and prevent the introduction of exotic taxa. A management plan should be developed and implemented for the system. It has previously been suggested that reclaiming peripheral shallow open water habitats with adequate reed corridors left between the open water areas would enhance the biodiversity of the system. It was also suggested that infilling of some of the excavated canals in the system would allow for an improvement in the PES. In developing the management plan, these suggestions should be investigated further.	Determine a Preliminary Wetland and Groundwater Reserve for the system as well as protection and management requirements for the groundwater to protect the associated dolomitic aquifer and flows into the system.
五							α	1				
REC							а	1				
∞				Hgh								
PES				B/C								
Wetland Type				Peat wetland (dolomitic eye)								
Wetland Name				Boovenste Oog								
Quaternary				C23B						C23F		
IUA				¥								

Wetland Type PES IS REC TEC Protection, Maintenance and Management Requirements	Unchannelled  Diffuse water distribution is required to optimise hydrological and biodiversity support functions.  Maintain and where possible improve the ecological condition for the purpose of the long-term protection of hydrological functions, biodiversity and as an important landscape feature. Maintain a viable representative sample of this ecosystem type and its associated biodiversity.  Implement measures to improve the existing flow distribution and retention patterns in the system to maintain the existing vegetation structure and composition.	Maintaining the perennial nature of the system and a diffuse water distribution pattern across the system are key features which determine it's ecological as well as functional importance.  Maintain the current ecological condition for the purpose of the long-term protection of the remaining peat, important biodiversity, flow regulation and water quality enhancement functions, and as an important and unique landscape feature.  Maintain and where possible improve the natural flow distribution and retention patterns in the system. Maintain good water quality normally associated with adoinnitic adulfers and associated peat wellands. Since peatlands require low energy flow with permanent saturation and anearchic conditions for peat to accommanded in the Perliminary Reserve in roude to constantly repleated to maintain a daily flow as recommended in the Perliminary Reserve in order to constantly repleated, thus preventing and ecomposing or burning.  C Din the other hand, improving the system based on an REC of EX would mean that it would be important to increase the daily flow into the peatland as indicated in the Perliminary Reserve. This would allow into the peatland so indicated in the Perliminary Reserve. This would allow into the peatland so indicated in the Perliminary Reserve. This would allow into the peatland so indicated in the Perliminary Reserve. This would result in an improvement in the system wish the re-wetting of lateral habitats, the inundation of currently exposed peat, and the re-establishment of the natural peat accumulation process, particularly in those areas where peat has previously been mined.	Ensure implementation of the rehabilitation measures recommended for the peat mining that has taken place in the system.  A management and rehabilitation plan should be developed and implemented for the system.  Update the existing Preliminary Wetland Reserve and determine a Preliminary Groundwater Reserve for the system as well as protection and management requirements for the groundwater to protect the associated dolomitic aquiter and flows into the system.
Wetland Type	Unchannelled Valley Bottom	Peat wetland	
Wetland Name	Mooi	Gerhard	
Quaternary Catchment	C23F	C23G	
IUA	nr	Π	

IUA	Quaternary Catchment	Wetland Name	Wetland Type	PES	S	REC	TEC	Ecological Specifications Protection, Maintenance and Management Requirements
n U	C23E	Abe Bailey Nature Reserve Wetlands	Unchannelled and Channelled Valley Bottom	<u>a</u>	High	U	O	Implement measures to improve the ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.  Ensure that the site and its catchment contributes towards the CBA and ESA landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.  Maintain and where possible enhance the existing flow distribution and retention patterns in the system.  Excessive nutrient inputs should be identified and addressed.
Tn n	C23H and C23L	O.P.M. Prozesky Bird Sanctuary	Floodplain	Ф	High	Q	Q	Implement measures to improve the current ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.  Ensure that the site and its catchment contributes towards the CBA landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.  Maintain and enhance the existing flow distribution and retention patterns in the system.
MA	C70K	Witpan	Pan	ī.	High	۵	Q	Implement measures to improve the current state (ecological condition) of the system for it to continue to provide existing services.  Excessive nutrient inputs to the system should be identified and addressed
WC	C24C	Pan and wetland complex - Leliefontein	Pan, Seeps and Unchannelled Valley Bottom	U	High	B/C	U	Maintain in the current ecological condition for the purpose of the long-term protection of the biodiversity and as an important landscape feature.  Maintain or improve existing ecological diversity and interconnectivity of the pan and associated wetland system.  Water quantity and quality impacts must be managed so as not to undermine the ecological value of the pan and its associated wetland.

<sup>3</sup> As this system is associated with a Nature Reserve, the TEC is recommended to be the same as the REC and is set one category higher than the PES

4 The system is in a PES category of E (Seriously Modified) but has a High IS as it is regarded as an important sanctuary for biridifie. A PES category of E is not sustainable so the TEC is recommended to be the same as the REC and is set one category higher than the PES

5 The system is in a PES category of F (Critically Modified) but has a High IS as it is regarded as an important sanctuary for birdlife. A PES category of F is not sustainable so the TEC is recommended to be the same as the REC and is set two categories higher than the PES

IUA	Quaternary	Wetland Name	Wetland Type	PES	<u>s</u>	REC	TEC	Ecological Specifications Protection, Maintenance and Management Requirements
								Maintain in the current ecological condition for the purpose of the long-term protection of the biodiversity and as an important landscape feature.
MC	C24C	Vetpan	Pan	O	High	B/C	O	Maintain or improve existing ecological diversity and interconnectivity of the pan and associated drainage system and surrounding natural habitats.
								Water quantity and quality impacts must be managed so as not to undermine the ecological value of the pan and its associated wetland.
		-						Maintain in current ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the CBA and ESA landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.
MC	C24C	Klippan and wetland system associated with Klippan	Pan and Unchannelled Valley Bottom	O	High	B/C	O	Water quantity and quality impacts must be managed so as not to undermine the ecological value of the pan and its associated wetland.
								Maintain and enhance the existing flow distribution and retention patterns in the system.
								Currently unchannelled wetlands must be maintained as unchannelled systems.  Maintain existing vegetation structure and composition.  The wetland should be assessed to identify notiential rehabilitation measures that will improve its current state.
								Maintaining the perennial nature of the system and a diffuse water distribution pattern across the system are key features which determine it's ecological as well as functional importance.
								Maintain in natural or near-natural ecological condition for the purpose of the long-term protection of important biodiversity, peat, flow regulation function, and as an important and unique landscape feature.
Ď.	C24C	Upper section of the Schoonspruit	Peat wetland and	α	Asil solv	<	0	Maintain the natural flow distribution and retention patterns in the system. Maintain good water quality normally associated with dolomitic aquifers and associated eyes/springs.
2	2	peatland and the Schoonspruit eye	dolomitic eye	۵	very night	∢	מ	Prevent over-abstraction form the associated dolomitic aquifer.
								Maintain the natural fish and macro-invertebrate diversity of the system and prevent the introduction of exotic taxa. A management plan should be developed and implemented for the system in consultation with interested and affected parties.
								Determine a Preliminary Wetland and Groundwater Reserve for the system as well as protection and management requirements for the groundwater to protect the associated dolomitic aquifer and flows into the system.

Ecological Specifications Protection, Maintenance and Management Requirements	Floods are needed to inundate the floodplain thereby providing the wetting regime required for supporting the floodplain vegetation that are dependent on flooding for their life cycles.	The lower section of the wetland is unchannelled and should remain as such as it is likely to provide water quality enhancement functions and habitat that is different from the rest of the system. This enhances the biodiversity of the wetland.	Maintain in the current ecological condition and where possible improve the condition of the system for the purpose of the long-term protection of important biodiversity and as an important landscape feature.	Maintain the existing flow distribution and retention patterns in the system to maintain the existing vegetation structure and composition.	Unchannelled sections of the wetland must be maintained as unchannelled and existing vegetation structure and composition should at least be retained or improved.	Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply.	The wetland should be assessed to identify potential rehabilitation measures that will improve its current state and the functions it is performing.	Floods are needed to inundate the floodplain thereby providing the wetting regime required for supporting the floodplain vegetation that are dependent on flooding for their life cycles.	Maintain in the current ecological condition and where possible improve the condition of the system for the purpose of the long-term protection of important biodiversity and as an important landscape feature.	Maintain the existing flow distribution and retention pattems in the system to maintain the existing  regetation structure and composition.	Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licerising conditions including monitoring of the systems should apply.	The wetland should be assessed to identify potential rehabilitation measures that will improve its current state and the functions it is performing.		
TEC	O									O				
REC	B/C									B/C				
<b>≅</b>	Hgh								High					
PES	O								O					
Wetland Type	Floodplain and Unchannelled Valley Bottom								Floodplain					
Wetland Name	Floodplain and lower section of the Taalbosspruit									Schoonspruit including Mahemsylei				
Quaternary				C24F						C24G				
IUA				MC						MC				

Ecological Specifications Protection, Maintenance and Management Requirements	Maintaining the perennial nature of the system and a diffuse water distribution pattern across the system are key features which determine it's ecological as well as functional importance.	Improve the ecological condition of the system for the purpose of the long-term protection of important biodiversity, peat, flow regulation function, and as an important and unique landscape feature.	Maintain the natural flow distribution and retention pattems in the system. Maintain good water quality normally associated with dolomitic aquifers and associated eyes/springs.	Prevent over-abstraction form the associated dolomitic aquifer.	Prevent and manage over-abstraction/diversion of flows/water from the peatland.	Maintain the natural fish and macro-invertebrate diversity of the system and prevent the introduction of exotic taxa. A management plan should be developed and implemented for the system in consultation with interested and affected parties.	Determine a Preliminary Wetland and Groundwater Reserve for the system as well as protection and management requirements for the groundwater to protect the associated dolomitic aquifer and flows into the system.	Maintain and where possible improve the current ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Ensure that the site and its catchment contributes towards the CBA1, ESA1 and ESA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.	Maintain and enhance the existing flow distribution and retention patterns in the system.	Pressure from sewage spills, physical obstruction, informal settlements and other in upstream area needs to be attended to.		
TEC	O								Q			۵
REC	O								C/D			۵
ō	Very High							High				High
PES	۵							۵				9
Wetland Type	Peat wefland							Unchannelled and Channelled Valley Bottom				and Channelled Valley Bottom
Wetland Name	Lower section of the Schoonspruit peatland							Grootvlei in a	tributary of the Heuningspruit	and on the Heuningspruit	Wetland system adjacent to Viljoenskroon	
Quaternary				C24C and C24E					C70G			C70K
IUA				MC					MA			MA

6 The system is in a PES category of E (Seriously Modified) but has a High IS due to its hydro-functional importance. A PES category of E is not sustainable so the TEC is recommended to be the same as the REC and is set one category higher than the PES

70

$\overline{}$	
Pa-	

Ecological Specifications C Protection, Maintenance and Management Requirements	Currently unchannelled wellands must be maintained as unchannelled systems.  Maintain or improve existing vegetation structure and composition.  The wetland should be assessed to identify potential rehabilitation measures that will improve its current state and ability to improve water quality.	Implement measures to improve the current ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.	Ensure that the site and its catchment contribute towards the CBA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.	Maintain and enhance the existing flow distribution and retention patterns in the system.	Monitor nutrient and sediment inputs from immediate catchments area.  The wetland should be assessed to identify potential rehabilitation measures to restore the hydrology to a more natural state.	Maintain and where possible improve the current ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.	Ensure that the site and its catchment contributes towards the CBA1 and ESA1 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity. Maintain and where possible enhance the existing flow distribution and retention patterns in the system.	Pressure from sewage spills, physical obstruction, informal settlements and other in upstream area needs to be attended to.	Currently unchannelled wetlands must be maintained as unchannelled systems. Maintain or improve existing vegetation structure and composition.  Lateral flow inputs to the wetland must be protected through application of hydrological buffers determined via hydro-pedological assessments undertaken as part of EIA and/or WUL applications, and strict licensing conditions including monitoring of the systems should apply.  The wetland should be assessed to identify potential rehabilitation measures that will improve its ability to enhance water quality.	Maintain in near-natural ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.	Ensure that the site and its catchment contributes towards the ESA1 and ESA2 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.
TEC			C/D							ă	
REC			C/D					C/D		ă	<u> </u>
δ		High					High		<u>.</u>		
PES		۵			۵				C	>	
Wetland Type		Pan			Unchannelled and Channelled Valley Bottom				Dan Altrefar		
Wetland Name		Groot Rietpan			Upper reaches of the Sandspruit (immediately north of Kutloanong)			Pan cluster around Wesselbron	including Volstruispan to the north		
Quaternary Catchment		C70K					C25B		C25B, C25F	and C43B	
IUA			MA					MF		MF and	MD2

M	Quaternary	Wetland Name	Wetland Type	PES	S	REC	TEC	Ecological Specifications Protection, Maintenance and Management Requirements
								Protect the water quality and ecological characteristics of the different pans associated with the cluster to ensure that they continue to provide the biodiversity support functions typically associated with the different pan types present.
								Maintain or improve existing ecological diversity and interconnectivity of individual depression wetlands (pans).
MD2	C43B	Flamingo Pan	Pan	F7	High	۵	٥	Implement measures to improve the current state of the pan for it to continue to provide existing services.  Excessive nutrient and pollution inputs should be identified and addressed.  Propose and implement physical and management interventions where required.
								In consultation with interested and affected parties explore and where feasible implement measures to improve the hydrological regime towards a more natural state.
ME2	C43A	Bultfontein Pan	Pan	۵	High	C/D	C/D	Prevent sewage effluent from flowing into the wetland system.
								Assess and monitor the impact of salt works and other activities on the hydrology and the biodiversity support function of the wetland. Propose and implement physical and management interventions where required.
MD2	C43B	Toronto Pan	Pan	ű.	High	Q	Q	Implement measures to improve the current state of the pan for it to continue to provide existing services. Excessive nutrient and pollution inputs should be identified and addressed. Propose and implement physical and management interventions where required.
								Maintain and if possible improve the current ecological condition for the purpose of the long-term protection of important biodiversity and as an important wetland and landscape feature.
LA1	C31D	Barberspan <sup>9</sup>	Pan	O	Very High	æ	B/C	Excessive nutrient and sediment inputs should be identified and addressed.
								Liaise with interested and affected parties to develop a collaborative management and monitoring plan together with that for Leeupan.

The system is in a PES category of F (Critically Modified) but has a High IS as it is regarded as an important sanctuary for birdlife. A PES category of F is not sustainable so the TEC is recommended to be the same as the REC and is set two categories higher than the PES

The system is in a PES category of F (Critically Modified) but has a High IS as it is regarded as an important sanctuary for birdiffe. A PES category of F is not sustainable so the TEC is recommended to be the same as the REC and is set two categories higher than the PES

<sup>&</sup>lt;sup>3</sup> The system is a Ramsar Site (Designated as a Wetland of International Importance in terms of the Ramsar Convention)

Ecological Specifications Protection, Maintenance and Management Requirements	Implement measures to improve the ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.  Excessive nutrient and/or sediment inputs should be identified and addressed.  Liaise with interested and affected parties to develop a collaborative management and monitoring plan together with that for Barbersean.	Erosion and channel incision threaten to undermine the flood attenuation functions of the wetland, it is also important to ensure the protection and maintenance of the floodplain habitats which support biodiversity.  Implement measures to improve the current condition of the wetland for the purpose of the long-term protection of important biodiversity and as an important landscape feature. Maintain a viable representative sample of this ecosystem types and its associated biodiversity.  Maintain and enhance the existing flow distribution and retention patterns in the system and maintain the hydrological and ecological link to Barberspan.  Maintain existing vegetation structure and composition.	Maintain and where possible improve the state of thepan for it to continue to provide existing hydrological and biodiversity support services.  Excessive nutrient and pollution inputs should be identified and addressed. Continuation of existing efforts to prevent sewage input and managing of water levels to prevent flooding of breeding areas.  Monitor threats such as eutrophication and reed encroachment.  Liaise with interested and affected parties to develop a collaborative management and monitoring plan for the pan.	Maintain and where possible improve the current ecological condition for the purpose of the long-term protection of important biodiversity and as an important landscape feature.  Ensure that the site and its catchment contributes towards the CBA1, CBA2 and ESA1 landscape level purpose for the site to represent and maintain a viable representative sample of this ecosystem types and its associated biodiversity.	
TEC	B/C	B/C	B/C	B/C	
REC	B/C	B/C	Ф	B/C	
S	High	High	Very High	High	
PES	C10	O	v	O	
Wetland Type	Pan	Floodplain	Pan	Pan	
Wetland Name	Leeupan	Harts River Floodplain	Kamferpan <sup>11</sup>	Gannapan	
Quaternary	C31D	C31E	C91E	C91B	
IUA	LA1	LA2	LB	EB	

10 As this system is associated with the Barberspan Ramsar Site, the TEC is recommended to be the same as the REC and is set half a category higher than the PES

11 Although largely artificially maintained, this system is a critical breeding site for Lesser Flamingo and strict protection requirements should be applied to ensure it remains a successful breeding site for this species

_
4
-

Ecological Specifications Protection, Maintenance and Management Requirements	Maintain existing hydrological regime and ecological processes to protect the pans and springs and associated wetland habitats in current ecological state.	Maintain the natural flow distribution and retention patterns in the system. Maintain good water quality normally associated with dolomitic aquifers and associated eyes/springs.	Prevent over-abstraction form the associated dolomitic aquifer.	A management plan should be developed and implemented for the system in consultation with interested and affected parties.  Determine a Preliminary Wetland and Groundwater Reserve for the system as well as protection and management requirements for the groundwater to protect the associated dolomitic aquifer, associated springs and flows into the	system.	
TEC			ш			
REC			A/B			
8			High			
PES			ш			
Vetland Name Wetland Type	Pans, Unchannelled Valley Bottom and Springs					
Wetland Name	Silverstreams Pan (The Great Pan) and associated Wetland Complex					
Quaternary	C92A					
IUA			9			

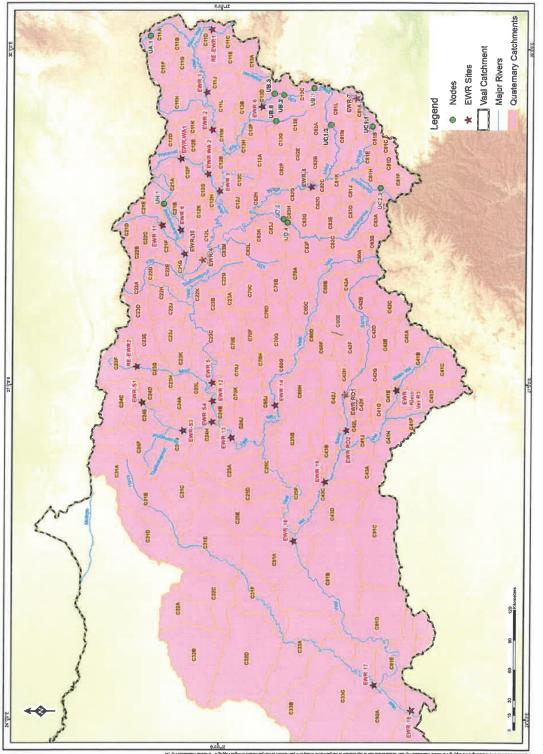


Figure 1: Map of the Vaal Catchment illustrating the quaternary catchments and EWR and node sites